

**20** PROGRAMMI  
PROGRAMS  
PROGRAMAS

- SOFT VACUUM  
- MARINATING FUNCTION  
- VACUUM SENSOR



BLIZZARD



ALYSEE



TORNADO

Dimensioni macchina Machine dimensions Dimensiones máquina	700x750x1110 h mm	780x750x1110 h mm	890x750x1110 h mm
Peso / Weight / Peso	100 kg <sup>A</sup>   119 kg <sup>B</sup>	191 kg <sup>A</sup>   215 kg <sup>B</sup>	220 kg <sup>A</sup>   227 kg <sup>B</sup>
Voltaggio / Voltage / Voltaje	110 V-50/60 Hz <sup>A</sup> ● 230 V-50/60 Hz <sup>A</sup> ● 220 V-50/60 Hz 3ph <sup>B</sup> ● 380 V-50/60 Hz 3ph <sup>B</sup> ●	220 V-50/60 Hz 3ph ● 380 V-50/60 Hz 3ph	220 V-50/60 Hz 3ph ● 380 V-50/60 Hz 3ph
Consumo / Consumption / Consumo	0,9 <sup>A</sup>   1,6 <sup>B</sup> kW	1,6 <sup>A</sup>   1,8 <sup>B</sup> kW	1,8 <sup>A</sup>   2,35 <sup>B</sup> kW
Dimensioni camera Chamber dimensions Dimensiones cámara	530x530x200 mm	660x540x250 mm	760x540x250 mm
Pompa a bagno d'olio Oil lubricated pump Bomba de baño de aceite	25 m3/h Busch® <sup>A</sup> 40 m3/h Becker® <sup>B</sup>	40 m3/h Becker® <sup>A</sup> 71 m3/h Becker® <sup>B</sup>	71 m3/h Becker® <sup>A</sup> 101 m3/h Becker® <sup>B</sup>
Barra saldante Welding bar Barra de soldadura	☐ 520 mm ● ☐ 520/520 mm	☐ 650/650 mm ● ☐ 520/520 mm ☐ 520/580 mm ● ☐ 520/515/520 mm	☐ 750/750 mm ● ☐ 520/520 mm ☐ 520/680 mm ● ☐ 520/615/520 mm
Seconda barra saldante (opz.) Second welding bar (opt.) Segunda barra de soldadura (opc.)		×	×
Terza barra saldante (opz.) Third welding bar (opt.) Tercera barra de soldadura (opc.)	×		
Barra taglio sfrido (opz.) ● Cut-off seal bar (opt.) Barra con corte de bolsa (opc.)	☐ ☐	☐ ☐	☐
Barra doppia saldatura (opz.) ● Double seal bar (opt.) Barra doble soldadura (opc.)			
Atmosfera protettiva (opz.) Protective atmosphere (opt.) Atmósfera protegida (opc.)			
Sensore di vuoto (opz.) ● Vacuum sensor (opt.) Sensor de vacío (opc.)	Incluso Included Incluido	Incluso Included Incluido	Incluso Included Incluido
Funzione marinatura (opz.) ● Marinating function (opt.) Funcion marinado (opc.)	Incluso Included Incluido	Incluso Included Incluido	Incluso Included Incluido
Stampante (opz.) Printer (opt.) Impresora (opc.)			
Soft air (opz.) Soft air (opt.) Soft air (opc.)			
Predisposizione vuoto teglie GN (opz.) Vacuum in GN pans prearrangement (opt.) Predisposición vacío en bandejas GN (opc.)	Incluso Included Incluido		
Piano inclinato per liquidi (acc.) Liquids inclined shelf (acc.) Estante inclinado para líquidos (acc.)		Su richiesta On demand Bajo pedido	Su richiesta On demand Bajo pedido

● Voltaggio speciale prezzo su richiesta

● Opzioni non cumulabili

● Di serie

Special voltage price on demand

Non-cumulative options

Standard

Voltaje especial precio a petición

Opciones no acumulativas

Estándar

20 PROGRAMMI  
 PROGRAMS  
 PROGRAMAS

- SOFT VACUUM  
 - MARINATING FUNCTION  
 - VACUUM SENSOR



MONSOON



MONSOON MT

MEAT INDUSTRY

LESTE

Dimensioni macchina Machine dimensions Dimensiones máquina	1090x750x1110 h mm	1090x750x1110 h mm	1250x900x1100 h mm
Peso / Weight / Peso	252 kg	289 kg	297 kg
Voltaggio / Voltage / Voltaje	220 V-50/60 Hz 3ph ● 380 V-50/60 Hz 3ph	220 V-50/60 Hz 3ph ● 380 V-50/60 Hz 3ph	220 V-50/60 Hz 3ph ● 380 V-50/60 Hz 3ph
Consumo / Consumption / Consumo	2,50 kW	2,50 kW	2,20 kW
Dimensioni camera Chamber dimensions Dimensiones cámara	960x540x250 mm	960x540x250 mm	1100x620x290 h mm
Pompa a bagno d'olio Oil lubricated pump Bomba de baño de aceite	101 m3/h Becker®	166 m3/h Becker®	166 m3/h Becker®
Barra saldante Welding bar Barra de soldadura	<input type="checkbox"/> 950/950 mm ● <input type="checkbox"/> 520/520 mm <input type="checkbox"/> 520/880 mm ● <input type="checkbox"/> 520/815/520 mm	<input type="checkbox"/> 950/950 mm ● <input type="checkbox"/> 520/520 mm <input type="checkbox"/> 520/880 mm ● <input type="checkbox"/> 520/815/520 mm	<input type="checkbox"/> 1090/1090 mm ● <input type="checkbox"/> 605/605 mm <input type="checkbox"/> 605/1035 mm ● <input type="checkbox"/> 605/990/605 mm
Terza barra saldante (opz.) Third welding bar (opt.) Tercera barra de soldadura (opc.)			
Barra taglio sfrido (opz.) ● Cut-off seal bar (opt.) Barra con corte de bolsa (opc.)	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/>
Barra doppia saldatura (opz.) ● Double seal bar (opt.) Barra doble soldadura (opc.)			
Atmosfera protettiva (opz.) Protective atmosphere (opt.) Atmósfera protegida (opc.)			
Sensore di vuoto (opz.) ● Vacuum sensor (opt.) Sensor de vacío (opc.)	Incluso Included Incluido	Incluso Included Incluido	Incluso Included Incluido
Funzione marinatura (opz.) ● Marinating function (opt.) Funcion marinado (opc.)	Incluso Included Incluido	Incluso Included Incluido	Incluso Included Incluido
Stampante (opz.) Printer (opt.) Impresora (opc.)			
Soft air (opz.) Soft air (opt.) Soft air (opc.)			
Predisposizione vuoto teglie GN (opz.) Vacuum in GN pans prearrangement (opt.) Predisposición vacío en bandejas GN (opc.)			
Piano inclinato per liquidi (acc.) Liquids inclined shelf (acc.) Estante inclinado para líquidos (acc.)	Su richiesta On demand Bajo pedido	Su richiesta On demand Bajo pedido	Su richiesta On demand Bajo pedido

● Extra vuoto

● Selezionare solo 1 barra per taglio sfrido

A Prezzo pompa 1; B prezzo pompa 2

Extra vacuum

Select just 1 bar for cut-off seal bar

A Pump price 1; B Pump price 2

Extra vacío

Seleccionar 1 sola barra para corte al ras

A Precio bomba 1; B Precio bomba 2

CAMPANE CARRELLATE  
STANDING CHAMBERS  
CAMPANAS SOBRERUEDAS

SLIDING

20 PROGRAMMI  
PROGRAMS  
PROGRAMAS

- SOFT VACUUM  
- MARINATING FUNCTION  
- VACUUM SENSOR



STORM




CYCLON



BAYAMO



TYPHOON



HURRICANE

Prezzo IVA escl.

Price

Precio

Dimensioni macchina

Machine dimensions

Dimensiones máquina

900x1060x1179h mm 1020x1260x1185h mm 1204x1483x1341h mm 1295x1900x1450 h mm 1213x2420x1597 h mm

Peso

Weight

Peso

236 Kg

319 Kg

537 Kg

685 Kg

767 Kg

Voltaggio

Voltage

Voltaje

400 V-3-50 Hz 220 V-3-60 Hz ● 400 V-3-50 Hz 220 V-3-60 Hz ● 400V-3-50 Hz 220V-3-60 Hz ● 400V-3-50 Hz 220V-3-60 Hz ● 400V-3-50Hz 220V-3-60Hz ●

Consumo

Consumption

Consumo

2,4 - 3,5 kW 3,0 - 5,0 kW 5,5 - 9,0 kW 7,0 - 9,0 kW 7,0 - 9,0 kW

Dimensioni camera

Chamber dimensions

Dimensiones cámara

(2x) 580x450x235 mm (2x) 700x550x235 mm (2x) 750x620x250 h mm (2x) 830x840x255 h mm (2x) 730x1100x280 h mm\* 1000x850x280 h mm\*\*

Pompa a bagno d'olio

Oil lubricated pump

Bomba de baño de aceite

63 m3/h Busch® 100 m3/h Busch® 160 m3/h Busch® 300 m3/h Busch® 300 m3/h Busch®

Barra saldante

Welding bar

Barra de soldadura

(2x) 450/450 mm ● (2x) 550/550 mm ● (2x) 620/620 mm ● (2x) 840/840 mm ● (2x) 840/840 mm ● (2x) 840/840 mm ● (2x) 770/770 mm ● (2x) 1100/1100 mm\* ● (2x) 850/850 mm\*\*

Barra taglio sfrido ●

Cut-off seal bar

Barra con corte de bolsa

Barra doppia saldatura ●

Double seal bar

Barra doble soldadura

Incluso Included Incluso Included Incluso Included Incluso Included Incluso Included

Atmosfera protettiva (opz.)

Protective atmosphere (opt.)

Atmósfera protegida (opc.)

Sensore di vuoto (opz.) ●

Vacuum sensor (opt.)

Sensor de vacío (opc.)

Incluso Included Incluso Included Incluso Included Incluso Included Incluso Included

Funzione marinatura (opz.) ●

Marinating function (opt.)

Funcion marinado (opc.)

Incluso Included Incluso Included Incluso Included Incluso Included Incluso Included

Stampante (opz.)

Printer (opt.)

Impresora (opc.)

Terza barra saldante (opz.)

Third welding bar (opt.)

Tercera barra de soldadura (opc.)

× × × × × Su richiesta On demand Bajo pedido

● Voltaggio speciale prezzo su richiesta

● Opzioni non cumulabili

● Di serie

● Extra vuoto

Special voltage price on demand

Non-cumulative options

Standard

Extra vacuum

Voltaje especial precio a petición

Opciones no acumulativas

Estándar

Extra vacío

TEGLIE GASTRONORM  
GASTRONORM TRAYS  
CONTENEDORES GASTRONORM



GN 1/1



GN 1/2



GN 1/3

Teglia H 200  
Tray H 200  
Bandeja H 200

×

×

Teglia H 150  
Tray H 150  
Bandeja H 150

Teglia H 100  
Tray H 100  
Bandeja H 100

Coperchio policarbonato comprensivo di guarnizione e valvola  
Polycarbonate lid including gasket and valve  
Tapa en policarbonato con junta y válvula

Coperchio inox comprensivo di guarnizione e valvola  
Stainless steel lid including gasket and valve  
Tapa inox con junta y válvula


×

PEZZI DI RICAMBIO | SPARE PARTS | REPUESTOS

Guarnizione coperchio policarbonato  
Polycarbonate lid gasket  
Junta tapa en policarbonato

Valvola coperchio policarbonato  
Polycarbonate lid valve  
Válvula para tapa en policarbonato

Valvola coperchio inox  
Stainless steel lid valve  
Válvula para tapa en inox

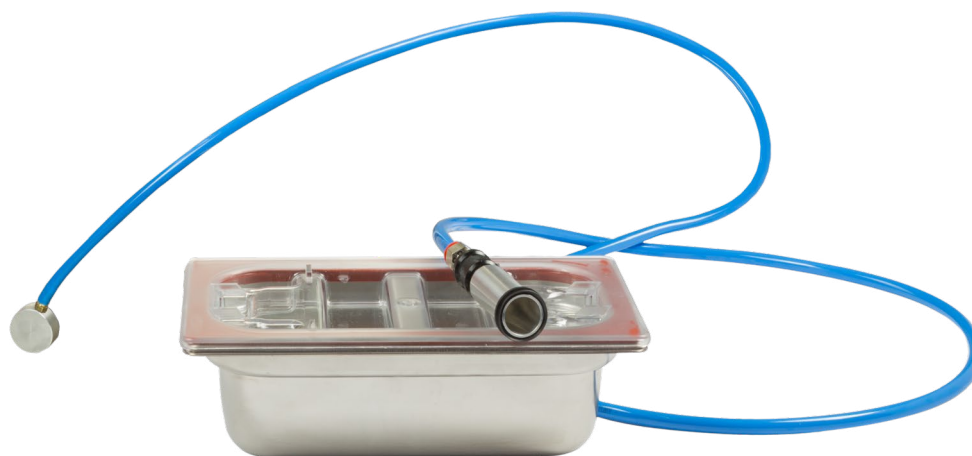

TUBO PER VUOTO IN TEGLIE GN | GN PANS SUCTION PIPE | TUBO PARA BANDEJAS GN