



| mod.       | rango range °C | largo length (mm) | alto height (mm) | fondo depth (mm) | estantes shelves GN 2/1 | volumen capacity (L) | voltaje voltage | refrigerante refrigerant | potencia frig. frig. power W | potencia power W | CCE EEC 2015/1094 EN16825 | clase climate 2015/1094 EN16825 |
|------------|----------------|-------------------|------------------|------------------|-------------------------|----------------------|-----------------|--------------------------|------------------------------|------------------|---------------------------|---------------------------------|
| CSR-751-S  | -2°C<br>+8°C   | 660               | 2160             | 735              | 3                       | 505                  | 230V-50Hz       | R134a*                   | 245                          | 253              | E                         | 5 40°C 40%                      |
| CSR-752-S  | -2°C<br>+8°C   | 660               | 2160             | 735              | 3                       | 505                  | 230V-50Hz       | R290                     | 502                          | 243              | D                         | 5 40°C 40%                      |
| CSN-751-S  | -20°C<br>-15°C | 660               | 2160             | 735              | 3                       | 505                  | 230V-50Hz       | R290                     | 606                          | 553              | E                         | 4 30°C 55%                      |
| CSN-752-S  | -20°C<br>-15°C | 660               | 2160             | 735              | 3                       | 505                  | 230V-50Hz       | R449A*                   | 452                          | 620              | E                         | 4 30°C 55%                      |
| CSR-1300-S | -2°C<br>+8°C   | 1350              | 2160             | 735              | 6+3                     | 1201                 | 230V-50Hz       | R134a*                   | 485                          | 442              | E                         | 5 40°C 40%                      |
| CSR-1303-S | -2°C<br>+8°C   | 1350              | 2160             | 735              | 6+3                     | 1201                 | 230V-50Hz       | R290                     | 845                          | 373              | D                         | 5 40°C 40%                      |
| CSN-1300-S | -20°C<br>-15°C | 1350              | 2160             | 735              | 6+3                     | 1201                 | 230V-50Hz       | R290                     | 907                          | 952              | E                         | 4 30°C 55%                      |
| CSN-1303-S | -20°C<br>-15°C | 1350              | 2160             | 735              | 6+3                     | 1201                 | 230V-50Hz       | R449A*                   | 1042                         | 990              | E                         | 4 30°C 55%                      |


\* no disponible mercado UE - not for EU market

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior en acero inox AISI-304, excepto respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas AISI-304 de apertura reversible (modelos 750), con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo CSR 40°C ambiente  
CSN 32°C ambiente

- AISI-304 stainless steel exterior, except the rear side and base
- AISI-304 stainless steel interior, rounded corners and stamped bottom
- AISI-304 doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense (750 models)
- Shelves made of plasticized steel wire, height adjustable
- Stainless steel adjustable legs, 35 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature CSR 40°C ambient  
CSN 32°C ambient

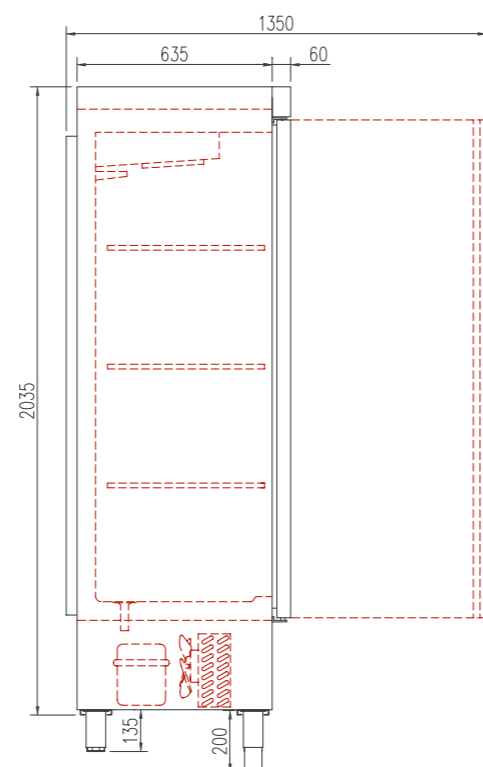

| OPCIONES                      | OPTIONS                       | €         |
|-------------------------------|-------------------------------|-----------|
| parrilla adicional            | additional shelf              | 35 €      |
| parrilla intermedia adicional | additional intermediate shelf | 20 €      |
| set 4 ruedas                  | set 4 wheels                  | 98 €      |
| set 6 ruedas                  | set 6 wheels                  | 146 €     |
| 230V 60Hz / 115V 60Hz         | 230V 60Hz / 115V 60Hz         | consultar |



CSR-751-S



AISI-304



CSR-1303-S