

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	puertas doors	separador shelves	capacidad capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2019/2018 EN16902
BE-100	+2°C +8°C	1010	850	550	2	1	270	230V-50Hz	R600a	176	125	D
BE-150	+2°C +8°C	1500	850	550	3	2	420	230V-50Hz	R600a	205	126	C
BE-200	+2°C +8°C	1990	850	550	4	3	580	230V-50Hz	R600a	304	184	D
BE-250	+2°C +8°C	2480	850	550	5	4	720	230V-50Hz	R290	502	208	D
BE-300	+2°C +8°C	2970	850	550	6	5	860	230V-50Hz	R290	533	244	D



BE-250-I



BE-150-EA

Características técnicas y constructivas sujetas a variación sin previo aviso.

BE-I

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304

BE-A

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en aluminio

BE-EA

- Exterior en acero plastificado blanco, excepto el respaldo
- Interior en acero galvanizado

CARACTERISTICAS COMUNES

- Puertas inox deslizantes sobre bastidor
- Encimera de acero inox AISI-304
- Separadores interiores en alambre de acero plastificado
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador estático
- Unidad condensadora ventilada y extraíble
- Control mecánico de temperatura, digital con pantalla, en opción.
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

BE-I

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior

BE-A

- AISI-304 stainless steel exterior, rear side galvanized panel
- Aluminium interior

BE-EA

- Plasticized exterior, rear side galvanized panel
- Interior in galvanized steel

FEATURES IN COMMON


- Stainless steel sliding doors
- AISI-304 stainless steel worktop
- Plasticized steel wire internal dividers
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Static evaporator
- Removable and fan assisted condenser unit
- Mechanic control of temperature, digital with display as optional
- Operating temperature, 32°C ambient



Máxima capacidad
Max capacity

OPCIONES

OPCIONES	OPTIONS
set 4 ruedas	set 4 wheels
set 6 ruedas	set 6 wheels
motor lado izquierdo	left side motor
control digital por pantalla	digital display control
puerta con cerradura	lockable door
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz

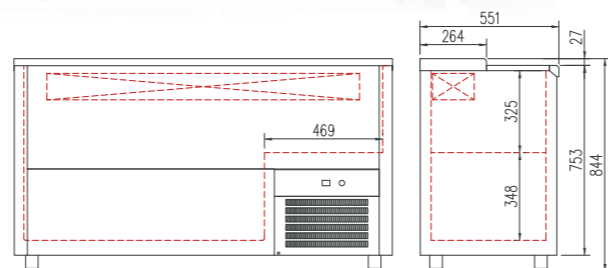

Puerta con cerradura opcional
Door with lock on demand

