



MRPV-250



MRP-200 exterior blanco opcional
option white exterior

| mod. | rango range °C | largo length (mm) | alto height (mm) | fondo depth (mm) | estantes shelves 40x60 | pares guías slides sets | volumen capacity (L) | voltaje voltage | refrigerante refrigerant | potencia frig. frig. power W | potencia power W | CCE EEC 2015/1094 EN16825 | clase climate 2015/1094 EN16825 |
|----------|----------------|-------------------|------------------|------------------|------------------------|-------------------------|----------------------|-----------------|--------------------------|------------------------------|------------------|---------------------------|---------------------------------|
| MRP-150 | -2°C +8°C | 1495 | 850 | 800 | 0 | 9 | 362 | 230V-50Hz | R134a* | 178 | 211 | - | 5 40°C 40% |
| | | | | | | | | | R290 | 502 | 235 | A | 5 40°C 40% |
| MRP-200 | -2°C +8°C | 2020 | 850 | 800 | 0 | 14 | 562 | 230V-50Hz | R134a* | 245 | 249 | - | 5 40°C 40% |
| | | | | | | | | | R290 | 502 | 238 | A | 5 40°C 40% |
| MRP-250 | -2°C +8°C | 2545 | 850 | 800 | 0 | 19 | 761 | 230V-50Hz | R134a* | 304 | 289 | - | 5 40°C 40% |
| | | | | | | | | | R290 | 845 | 370 | B | 5 40°C 40% |
| MRPV-150 | -2°C +8°C | 1495 | 850 | 800 | 0 | 9 | 362 | 230V-50Hz | R134a* | 304 | 295 | - | 4 30°C 55% |
| | | | | | | | | | R290 | 502 | 244 | C | 4 30°C 55% |
| MRPV-200 | -2°C +8°C | 2020 | 850 | 800 | 0 | 14 | 562 | 230V-50Hz | R134a* | 304 | 302 | - | 4 30°C 55% |
| | | | | | | | | | R290 | 502 | 251 | C | 4 30°C 55% |
| MRPV-250 | -2°C +8°C | 2545 | 850 | 800 | 0 | 19 | 761 | 230V-50Hz | R134a* | 485 | 446 | - | 4 30°C 55% |
| | | | | | | | | | R290 | 845 | 358 | D | 4 30°C 55% |
| MCP-150 | -20°C -15°C | 1495 | 850 | 800 | 0 | 9 | 362 | 230V-50Hz | R290 | 606 | 535 | E | 5 40°C 40% |
| | | | | | | | | | R449A* | 353 | 552 | - | 4 30°C 55% |
| MCP-200 | -20°C -15°C | 2020 | 850 | 800 | 0 | 14 | 562 | 230V-50Hz | R290 | 606 | 556 | E | 4 30°C 55% |
| | | | | | | | | | R449A* | 452 | 610 | - | 4 30°C 55% |
| MCPV-150 | -20°C -15°C | 1495 | 850 | 800 | 0 | 9 | 362 | 230V-50Hz | R290 | 606 | 544 | E | 4 30°C 55% |
| | | | | | | | | | R449A* | 353 | 518 | - | 4 30°C 55% |
| MCPV-200 | -20°C -15°C | 2020 | 850 | 800 | 0 | 14 | 562 | 230V-50Hz | R290 | 606 | 569 | E | 4 30°C 55% |
| | | | | | | | | | R449A* | 452 | 681 | - | 4 30°C 55% |

* no disponible mercado UE - not for EU market


Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo y fondo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera de acero inox AISI-304 con frente curvo (opcional con peto)
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura ambiente de trabajo: MRP / MCP 40°C
MRPV / MCPV 32°C

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, except rear side and base
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, with rounded front (optional with upstand)
- AISI-304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating ambient temperature: MRP / MCP 40°C
MRPV / MCPV 32°C

| OPCIONES | OPTIONS |
|---------------------------|-----------------------------|
| parrilla suplemento | shelf supplement |
| parrilla 60x40 | shelf 60x40 |
| set adicional guías 60x40 | additional set slides 60x40 |
| cerradura puerta inox | SS door lock |
| cerradura puerta cristal | glass door lock |
| motor lado izquierdo | left side motor |
| encimera con peto | worktop with splash-back |
| set 4 ruedas | set 4 wheels |
| set 6 ruedas | set 6 wheels |
| tropicalizado 43°C | tropicalized 43 °C |
| 230V 60Hz / 115V 60Hz | 230V 60Hz / 115V 60Hz |
| respaldo inox | SS rear side |
| encimera de granito | granite countertop |
| exterior color blanco | white exterior |
| APPCC | HACCP |

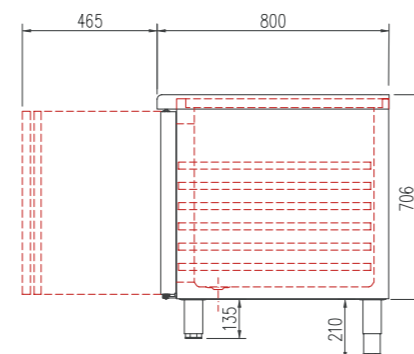

Encimera granito opcional
Optional granite worktop



Cerradura opcional
Optional lock



Encimera con peto y rueda opcionales
Optional castors and splashback

