



# Armario de refrigeración

## Bottom mounted refrigeration reach in



Serie  
**NACIONAL**  
500/1000L  
Series

### CARACTERÍSTICAS TÉCNICAS

#### Nuevo controlador digital



El **nuevo controlador de fácil manejo táctil IP65** tiene una **mayor precisión** en el control de la temperatura. Mayor facilidad para el ajuste del intervalo de temperaturas que deseamos conseguir.

#### Iluminación



Incorporación de **iluminación LED**, llegando a **reducir** el consumo energético **entre un 80% y 90%**, respecto a una bombilla tradicional.

### TECHNICAL CHARACTERISTICS

#### New control system

The **new intuitive tactile IP65 controller** has a **greater precision** in the control of the temperature. Easier to adjust the temperature range we want to achieve.

#### Lighting

**LED lighting** incorporated, **reducing** energetic consumption **between 80% and 90%** respect to a traditional lighth bulb.

3

AN 502 T/F



Más detalles y ficha técnica en:




Versión español

More details and technical sheet:



English version

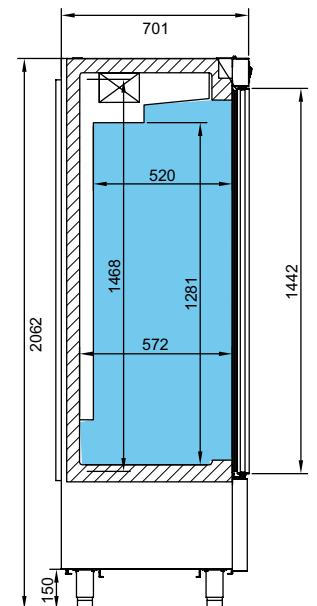

AN

#### MOD.

	Acero inox Stainless Steel [EXT/INT]	Espesor Thickness [MM]	Capacidad Capacity [L]	Puertas Doors	Nº parrillas J. guías No shelves / Slides	Potencia Power [W]	Potencia frigorífica Cooling capacity [W A -10°C]	Consumo Consumption [kWh/24h]	Clase energética Energy class	Refrigerante Refrigerant
AN 502 T/F	AISI 304	55	500	2	3/3 [530x460]	230	343	1,45	<b>C</b>	<b>R-290</b>
AN 1003 T/F	AISI 304	55	1110	3	6/6 [530x510]	420	690	2,53	<b>B</b>	<b>R-290</b>
AN 1004 T/F	AISI 304	55	1110	4	6/6 [530x510]	420	690	2,53	<b>B</b>	<b>R-290</b>

Fotografías no contractuales / Non contractual pictures.

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.

Los datos técnicos están sujetos a posibles variaciones que serán actualizadas periódicamente en las fichas técnicas del producto, disponibles en la web. The technical data are subject to possible variations that will be updated periodically in the technical data sheets of the product, which are available on the website.



# Armario de refrigeración

Bottom mounted refrigeration reach in

Serie  
**NACIONAL**  
500/1000L  
Series

## REFRIGERACIÓN



### Refrigeración

Sistema de frío **ventilado**.

Bandeja **evaporativa** sin resistencia eléctrica para una mayor eficiencia energética.

## REFRIGERATION

### Refrigeration

**Ventilated** cooling system.

**Evaporative** tray without electrical resistor for a better energy class.

AN 1003



AN 502 T/F



AN 1003 T/F




AN 1004 T/F

687 x 700 x 2060 mm.	687 x 700 x 2060 mm.	1385 x 700 x 2060 mm.
Temp. -2°C/+8°C	Temp. -2°C/+8°C	Temp. -2°C/+8°C
C. Clima. 5 / 40°C	C. Clima. 5 / 40°C	C. Clima. 5 / 40°C
230V/1ph/50Hz	230V/1ph/50Hz	230V/1ph/50Hz

### Opcional / Optional

Parrilla / Wire shelf AN 500 (502X04)  
 Parrilla / Wire shelf AN 1000 (502X02)  
 Juego de guías / Slides AN 500 (503X14); 503X19)  
 Juego de guías / Slides AN 1000 (503X12; 503X17)  
 Barra carnicera / Meat bar set (BCAN)  
 Cerradura / Lock (506X209; 506X210)  
 Manejo control digital por bluetooth / Operating digital control by bluetooth  
 115V/1ph/60Hz  
 230V/1ph/60Hz

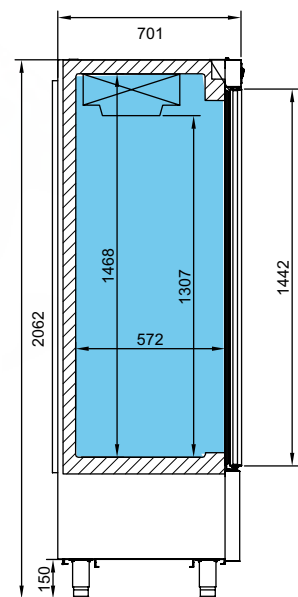

AN 1003

ARMARIOS  
REACH INS

Fotografías no contractuales / Non contractual pictures.

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.

Los datos técnicos están sujetos a posibles variaciones que serán actualizadas periódicamente en las fichas técnicas del producto, disponibles en la web.

The technical data are subject to possible variations that will be updated periodically in the technical data sheets of the product, which are available on the website.

