

COLORS, FABRICS & FINISHES

VONDOM



PRODUCT
COLORS


Basic. Básico.




White 2001 Steel 2005 Anthracite 2006 Black 2002 Ice 2101



Ecrú 2003 Taupé 2004 Crema Beige 2007 Bronze 2008

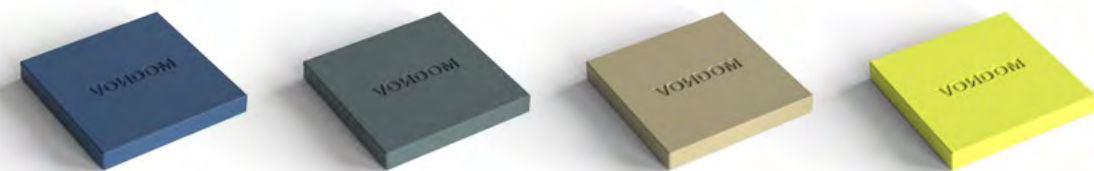

Navy 2013 Modo Green Khaki 2009 Pistachio 2010

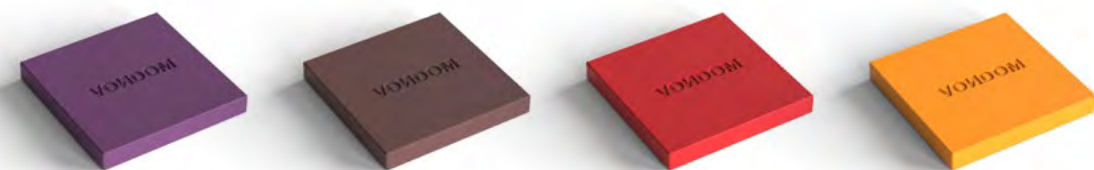

Plum 2012 Purjai Red Red 2014 Orange 2011


Lacquered. Lacado.




White 3101 Steel 3105 Anthracite 3106 Black 3102



Ecrú 3103 Taupé 3104 Crema Beige 3107 Champagne 3115 Bronze 3108

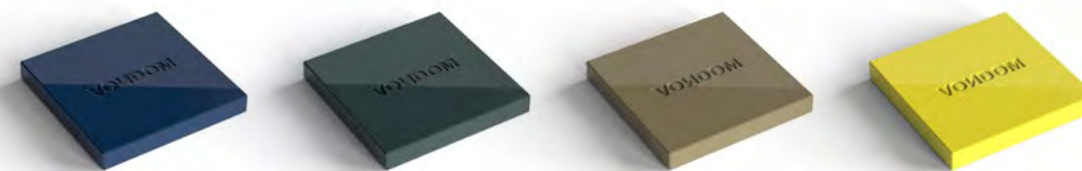

Navy 3113 Modo Green Khaki 3109 Pistachio 3110

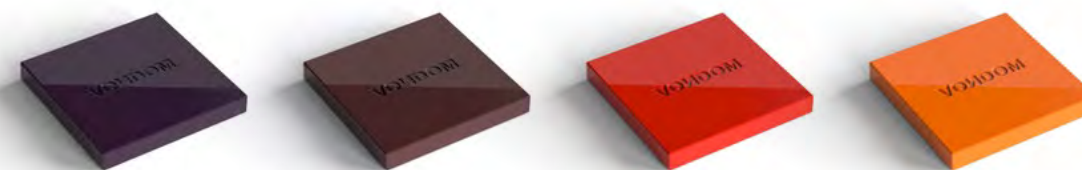

Plum 3112 Purjai Red Red 3114 Orange 3111

TABLE
BASES

Basic injection.
Básico inyección.



White / Milos Ecu / Cala Tortora Gray Black / Manta




Navy Almond Pickle



Red Melon Mostaza Bronze

Clear PC.
PC translúcido.

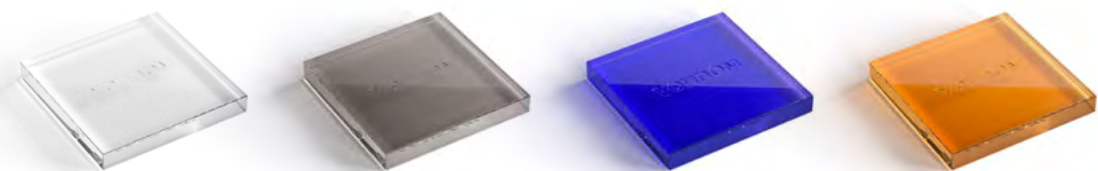

Cristal 4101 Fume 4103 Zaphire 4106 Amber 4102



Opaque White PC 4105 Opaque Black PC 4104

Powder Coated Aluminium.
Aluminio lacado al horno.



White 5001 British Gray 5038 Traffic Gray 5037 Black 5002



Ecu 5034 Crema 5036 Castoro Fiber 5035 Bronze 5033



Navy 5017 Modo Green Pickle 5020 Almond 5019



Red 5014 Purjai Red 5031 Melon 5018 Mostaza 5016

Ash Wood.
Madera de fresno.



Wood 1 Wood 2

TABLE
TOPS

HPL Solid Core.
HPL Solid Core



White
Solid Core
(10 & 12mm)




British Gray 7009
Solid Core
(10mm)



Traffic Gray 7008
Solid Core
(10mm)



Modo Green 7003
Solid Core
(10mm)



Notte Blue 7001
Solid Core
(10mm)



Crema 7007
Solid Core
(10mm)



Piombo Gray 7005
Solid Core
(10mm)




Castoro Fiber 7006
Solid Core
(10mm)




Cacao 7004
Solid Core
(10mm)




Purjai Red 7002
Solid Core
(10mm)




Marmo Gioia 7101
Solid Core
(10mm)




Yule Brown 7105
Solid Core
(10mm)



Pulpis Gray 7104
Solid Core
(10mm)



Yule Gray 7102
Solid Core
(10mm)



Kandia Black 7103
Solid Core
(10mm)

HPL Black Edge.
HPL borde negro.



Black
Black-edge
(10 & 12mm)



White
Black-edge
(10 & 12mm)



Ecru
Black-edge
(10 & 12mm)

Glass.
Vidrio.




Glass
(10mm)



White Opaque Glass
(Only available for coffee tables)



Black Opaque Glass
(Only available for coffee tables)




Bronze Smoked Glass
(Only available for coffee tables)

DEKTON®
Ceramic Surfaces.



Entzo
Dekton
(12mm)



Danae
Dekton
(12mm)



Kelya
Dekton
(12mm)

Nautical. (Group 1)



White 3102



Steel 3112



Ecru 3111



Beige 3105




Bronze 3120



Black 3126



Plum 3119



Navy 3124



Red 3117



Pistachio 0041



Orange 3115

Silvertex. (Group 1)



White 4004




Champagne 1051



Beige 1010



Ecru 0009



Bronze 0005



Steel 4001



Taupé 4024



Anthracite 9002




Khaki 5009



Pistachio 5008



Plum 2016



Navy 3068

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Nautical. Soft acrylic outdoor fabric with leather-like texture.	657 gr/m ²	EN 1021 1-2 DIN 4102 B2 BS 5852 DIN 53438/T2 CAL TB 117	>100.000 cycles	XENOTEST DIN 54004/NTC 1479 ASTM D-4329/ CFFA- 2 c2	100% Polyester HiLoft Backing	Clean using a cotton cloth with neutral soap 1/9 water solution. Rub dry with a clean cloth and let dry.	

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Silvertex. Soft-shiny acrylic outdoor fabric.	685 gr/m ²	EN 1021 1-2 DIN 4102 B2 NF P 92-503 / M2 UNE 23.727-90 IR/ M2 IMO MSC.307 CAL TB 117	>300.000 cycles	>7 - DIN 54004 NTC 1479 (UV outdoor) 4 - ISO 105B04	100% PVC	Clean using a cotton cloth with neutral soap 1/9 water solution. Do not use Rub dry with a clean cloth and let dry.	

Savane. (Group 1) 






White 1501




Whisper 1502




Tornado 1503

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Savane. An irregular weave reveals its textural beauty. Suited naturally to all outdoor furnitures.	400 gr/m ²	CAL TB 117 NFPA 260 UFAC - Class I	50.000 cycles	(UV indoor) 8/8 - ISO 105B02 (UV outdoor) 4-5 - ISO 105B04	100% Acrylic	Clean using a cotton cloth with 1/5 household bleach solution. Remove all bleach residues with water. Rub dry with a clean cloth and let dry.	  


Crevin. (Group 1)



White 07




Steel 51



Anthracite 53



Taupe 54




Deep Blue 1302





Blue 1301



Lemongrass 1303



Melon 1304

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Crevin. Upholstery fabric with a medium size and elegant weave. 40% made with recycled PET.	520 gr/m ²	EN 10211 BS5852 0/1 CAL TB 117 NFPA 260	60.000 cycles	(water) 4-5 - ISO 105E03/02/01 (UV outdoor) >6 - ISO 105B04	40% Recycled PET 60% PP	Clean using a cotton cloth with 1/5 household bleach solution. Remove all bleach residues with water. Rub dry with a clean cloth and let dry.	 


Dralon. (Group 1)




White 1401



Ecru 1402



Black 1403




Bronze 1404

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Dralon. Basic acrylic outdoor fiber for contract products' cushions.	185 gr/m ²	BS5852 0/1 UNE 10211 BS7176 Low hazard	25.000 cycles	(UV indoor) 6-7/8 - ISO 105B02 (water) 5 - ISO 105E03/02/01	100% Acrylic	Clean using a cotton cloth with neutral soap solution. Rub dry with a clean cloth and let dry.	 

Heritage. (Group 1) 


Made with recycled acrylic.



Papyrus 18006-0000



Granite 18004-0000

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Heritage. Made using 50% of recycled plastics.	335 gr/m ²	BS5852 0/1 UNE 10211 BS7176 Low hazard	25.000 cycles	(UV indoor) 7-8/8 - ISO 105B02 (UV outdoor) 5/5 - ISO 105B04	50% Recycled acrylic, 47% Sunbrella acrylic, 3% PE	Clean using a cotton cloth with neutral soap solution. Rub dry with a clean cloth and let dry.	

Cico. (Group 1)



Limestone 1701




Gravel 1702



Sandstone 1703



Greywacke 1704



Onix 1705



Cranberry 1707



Blueberry 1706

MS Acapulco. (Group 1)



Acapulco 1801




Acapulco 1802




Acapulco 1803



Acapulco 1804



Acapulco 1805




Acapulco 1806

MS Siesta. (Group 1)




Siesta 1810



Siesta 1811




Siesta 1812




Siesta 1813


MS Ikon. (Group 1)



Ikon 1830



Ikon 1831




Ikon 1832



Ikon 1833




Ikon 1834




Ikon 1835


Glad. (Group 2)




Berry 1021




Masai 1018



Sunset 1020




Noa 1026




Pruna 1045




Vera 1019




Afrodita 1013




Grana 1046




Dahlia 1035



Bacco 1034



Amatista 1011



Galan 1025




Perla 1006




Eclipse 1023




Calipso 1017




Wine 1012



Foc 1052




Hestia 1014




Chocolate 1050



Moka 1010




Night 1024



Ultramar 1002



Niord 1015



Aquamarina 1003




Esmeralda 1016



Ecrú 1047



Desert 1033




Taupé 1048




Terra 1039



Duna 1009




Bosc 1029



Artemisa 1027




Oceano 1005



Caribe 1004




Turquoise 1053




Oasis 1007



Moon 1040




Granito 1008



Grey 1043




Anthracite 1044



Aguacate 1028



Lima 1030



Delhi 1038




Oro 1031




Ocre 1051



Snow 1041



Iceberg 1037



Steel 1042

FABRIC
TEJIDO

WEIGHT
PESO

FLAME RESISTANCE
RESIST. IGNÍFUGA

RESISTANCE
ABRASION

COLOR FASTNESS
SOLIDEZ DEL COLOR

COMPOSITION
COMPOSICIÓN

MAINTENANCE
MANTENIMIENTO

SYMBOLS
SÍMBOLOS


Glad.
Impressive outdoor fabric with an elegant thick wave.

975 gr/m²

BS5852 (I)


30.000 cycles

Clean using a cotton cloth with neutral soap solution. Rub dry with a clean cloth and let dry.



SUNROOF & SCREENS

Ropes.

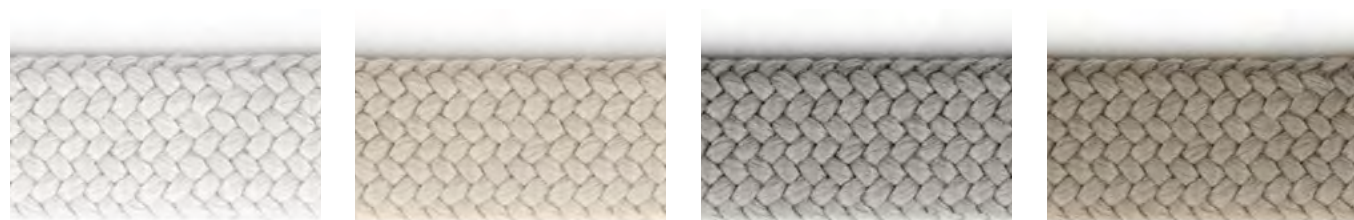

Snow

Ecrú

Gray

Taupe

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Glad Ropes. Impressive outdoor woven cords with an elegant thick wave.	975 gr/m ²	BS5852 (1)	30.000 cycles	-		Clean using a cotton cloth with neutral soap solution. Rub dry with a clean cloth and let dry.	

Velum.



White Vim 2000

Steel Vim 2003

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Velum. Lightweight and semi-transparent fabrics for curtains. The shimmering reflections create a romantic and refined atmosphere.	165 gr/m ²	-	-	(UV indoor) 8/8 - ISO 105B02 (UV outdoor) 4-5 - ISO 105B04	100% Acrylic	Clean using a cotton cloth with 1/5 household bleach solution. Remove all bleach residues with water. Rub dry and let dry.	

Sunvision.



White Sv 8860


Silver Sv 8876

Ecrú Sv 8859

Bronze Sv U350

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Sunvision. Acrylic woven screen suitable for outdoors. It reduces the amount of light that passes through.	275 gr/m ²	-	-	(UV indoor) 7-8/8 - ISO 105B02 (UV outdoor) 4-5/5 - ISO 105B04	Polyester coated with PVC		

Batyline.

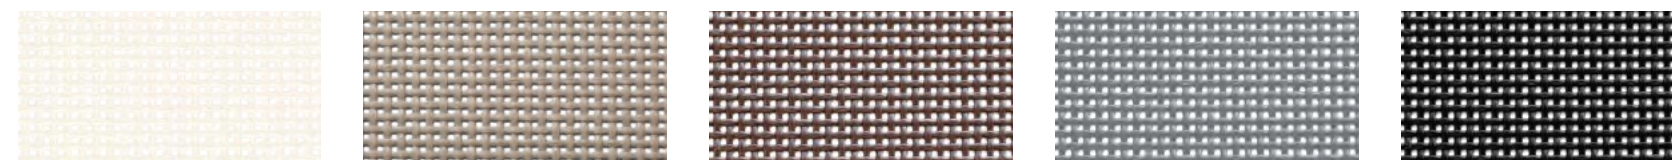

White 5001

Ecrú/Taupe 5014

Bronze 5048

Steel 5382

Black 5005

FABRIC TEJIDO	WEIGHT PESO	FLAME RESISTANCE RESIST. IGNÍFUGA	RESISTANCE ABRASION	COLOR FASTNESS SOLIDEZ DEL COLOR	COMPOSITION COMPOSICIÓN	MAINTENANCE MANTENIMIENTO	SYMBOLS SÍMBOLOS
Batyline. breathable acrylic mesh used on sun loungers and sunroofs. Thanks to its non-absorption and quick-dry features, Batyline mesh can be quickly dried off.	500 gr/m ²	EN 1021 1-2 EN 13501 - 1 DIN 4102 B1 NFP 92-507 CAL TB 117 IMO MSC 307	>120.000 cycles	4/5 ASTM G154	Polyester fibre protected with PVC coating.	Wash the mesh with a mild liquid detergent and fresh water, using a soft bristle brush. Batyline mesh has anti-fungal treatment where the moist will have no effect on it.	

PRODUCTS
AND FINISHES
TABLES

COLORES PIE MESAS. TABLE BASE COLORS

COLORES TABLEROS. TABLE TOP COLORS

	BASIC	LACADO LACQUERED	METAL METAL	HPL (borde negro) HPL (black edge)	HPL Solid Core HPL Solid Core	VIDRIO GLASS	DEKTON®
	White Black Bronze Steel Anthracite Pistachio Plum Beige Ecu Taupe Khaki Navy Ice Red Orange 	White Black Bronze Steel Anthracite Champagne Pistachio Plum Beige Ecu Taupe Khaki Navy Red Orange 	All Colors White Black Ecu 	White Black Bronze Steel Beige Ecu Taupe Red 		Ice Bronze Smoked White Opaline Black Opaline 	Ertzo Keya Danee
Biophilia Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●	●●	
Delta Central Base Tables			●	●●●●●●	●	●	●●●
Faz Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●	●●●	
Faz Wood Tables			●●●●	●●●●●●	●		●●●
Faz Inox Tables			●●●	●●●●●●	●	●●●	
Faz Central Base Tables			●	●●●●●●	●	●	●●●
Frame Aluminium Tables			●●●●	●●●●●●	●		●●●
Mari-sol Central Base Tables			●	●●●●●●	●	●	●●●
Pezzettina Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●		
Pixel Tables			●●●●	●	●		●●●
Quartz Tables	●●●●●●●●●●●●●●●●			●●●●●●	●		
Rest Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●	●●●	
Tablet Tables			●●●●	●	●		●●●
Ufo Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●	●●●	
Vases Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●		
Vela Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●	●●●	
Vertex Tables	●●●●●●●●●●●●●●●●	●●●●●●●●●●●●●●●●		●●●●●●●●	●	●	

TECHNICAL INFORMATION



EN | TECHNICAL INFORMATION

Finishes & Extras Furniture

All our products are suitable for indoor and outdoor use.

BASIC

Matte finish.

LACQUERED

High gloss lacquered.

TWO-TONE LACQUERED

High gloss lacquered finish in two different colors. To avoid possible damage we do not recommend stacking the product.

EXTRAS / OPTIONS

WHITE LED

White internally lit unit with LED technology. Available only in matte ice white finish.

RGBW LED

Unit with internal lighting with RGBW LED technology and remote control unit for switching colors. Available only in matte ice white finish. Remote control included.

RGBW LED DMX

Unit with internal lighting with RGBW LED technology and remote control unit for switching colors. Also controlled by DMX-1024 (wireless), enabling communication between one or more products simultaneously via the DMX transmitter (not included). There are two options to choose from: Professional XLR DMX and Home WIFI DMX.

Both options are available in various configurations:

1* DMX Wireless Standard Configuration.

2* DMX Wireless Customized Configuration.

WITH BATTERY

RGBW LED BATTERY

Unit with internal lighting with battery-powered RGBW LED technology. Includes charger and remote control for switching colors and charger. Available only in matte ice white finish.

RGBW LED DMX BATTERY

Unit with internal lighting with RGBW LED technology supplied by a battery (includes charger and remote control unit for switching colors). Also controlled by DMX-1024 (wireless), enabling communication between one or more products simultaneously via the DMX transmitter (not included). There are two options to choose from: Professional XLR DMX and Home WIFI DMX.

Both options can have 2 different configurations:

1* DMX Wireless Standard Configuration.

2* DMX Wireless Customized Configuration.

Finishes & Extras Nanos

Mini products made out of polyethylene resin. Item suitable for indoor and outdoor use.

NANO BASIC

Matte finish. The Ice matte finish can be illuminated.

NANO LACQUERED

High gloss lacquered.

EXTRAS / OPTIONS

NANO WHITE LED

Compact ice-colored unit with white LED lighting. For interior use only.

NANO RGBW LED WITH BATTERY (CHRISMY)

Compact ice-colored unit with white LED lighting. For interior use only. Charger and batteries included. (Includes remote control unit for changing color).

Finishes & Extras Pots & Planters

Pots and planters made out of a single walled polyethylene resin. Item suitable for outdoor use.

SIMPLE

Matte finish.

LACQUERED

High gloss lacquered.

BASIC

Matte finish.

The Ice matte finish can be illuminated.

SELF-WATERING SYSTEM

This system provides the plant with water whenever the plant needs it, this mechanism has an indicator that alerts us when the plant needs to be watered.

Available in matte and lacquered finishes only for indoor use.

Not recommended for outdoors. Due to the drainage, the indicator will not work properly.

LACQUERED

High gloss lacquered.

This self-watering system is included in the basic finish collections.

EXTRAS / OPTIONS

WHITE LED

White internally lit unit with LED technology. Available only in matte ice white finish.

RGBW LED

Unit with internal lighting with RGBW LED technology and remote control unit for switching colors. Available only in matte ice white finish. Remote control included.

RGBW LED DMX

Unit with internal lighting with RGBW LED technology and remote control unit for switching colors. Also controlled by DMX-1024 (wireless), enabling communication between one or more products simultaneously via the DMX transmitter (not included). There are two options to choose from: Professional XLR DMX and Home WIFI DMX.

Both options are available in various configurations:

1* DMX Wireless Standard Configuration.

2* DMX Wireless Customized Configuration.

WITH BATTERY

RGBW LED BATTERY

Unit with internal lighting with battery-powered RGBW LED technology. Includes charger and remote control for switching colors and charger. Available only in matte ice white finish.


RGBW LED DMX BATTERY

Unit with internal lighting with RGBW LED technology supplied by a battery (includes charger and remote control unit for switching colors). Also controlled by DMX-1024 (wireless), enabling communication between one or more products simultaneously via the DMX transmitter (not included). There are two options to choose from: Professional XLR DMX and Home WIFI DMX. (Remote control included).

Both options can have 2 different configurations:

1* DMX Wireless Standard Configuration.

2* DMX Wireless Customized Configuration.

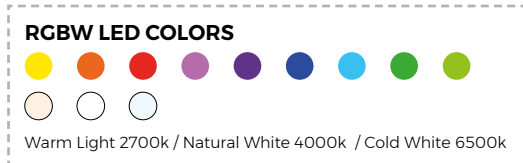

Bluetooth Sound System ✨

Connect your smartphone or tablet via Bluetooth to the built in speakers.

- Sound systems 200W Dual component.

- Bluetooth Ready v.4.0.

- Input: AUX Jack 3,5 mm.

- USB Charger for portable gadget - Output 5V= 1500mA

Lightining

POWER SUPPLY

LED WHITE

- Simple color LEDs 4500 K

- 720 - 2800 LM Max. (Models subject to availability)

- 12 - 72 W Max. (Models subject o availability)

- Power supply: Mean Well / Class 2 / IN: 100-240V AC / 50-60Hz

- IEE: Class A

- IP65 / applicable for wet areas.

- Ta: 40°C

- 4-5 m. white cable Ho5RN-F 2G1 mm2 + Plug (EU - AUS - UK) Ⓢ Ⓣ Ⓡ

- 4-5 m. white cable SJTW - 2 x AWG18 + Plug (USA) Ⓡ

- CE / RoHS / UL



NANO LED WHITE

- Simple color LEDs 4500 K

- 40 LM

- 14 W Max.

- Wall Power supply: IN: 100-240V AC / 50-60Hz

- IEE: Class A

- IP20 / indoor use only

- Ta: 35°C

- 2 Meters transparent cable with hand switch + EU Plug Ⓢ

- CE / RoHS

RGBW LED

- Multicolor LEDs RGBW

- Controller RF433 Mhz / 10-15 meters range

- 450 - 1100 LM Max. (Models subject to availability)

- 16 - 72 W Max. (Models subject to availability)

- Power supply: Mean Well / Class 2 / IN: 100-240V AC / 50-60Hz

- IEE: Class A

- IP65 / applicable for wet areas.

- Ta: 40°C

- 4-5 m. white cable Ho5RN-F 2G1 mm2 + Plug (EU - AUS - UK) Ⓢ Ⓣ Ⓡ

- 4-5 m. white cable SJTW - 2 x AWG18 + Plug (USA) Ⓡ

- CE / RoHS / UL



RGBW LED DMX

- Multicolor LEDs RGBW

- Controller RF433 Mhz / 10-15 meters range

- DMX 1024 decoder / 2.4Ghz wireless signal/ compatible with IOS or Android & Professional Installations.

- DMX 1024 decoder / 2.4 Ghz wireless signal.

-Home WiFi DMX wireless controller, compatible with IOS and Android (not included)

-Professional DMX wireless controller, connector XLR (not included)

- 450 - 1100 LM Max. (Models subject to availability)

- 12 - 72 W Max. (Models subject to availability)

- Power supply: Mean Well / Class 2 / IN: 100-240V AC / 50-60Hz

- IEE: Class A

- IP65 / applicable for wet areas.

- Ta: 40°C

- 4-5 m. white cable Ho5RN-F 2G1 mm2 + Plug (EU - AUS - UK) Ⓢ Ⓣ Ⓡ

- 4-5 m. white cable SJTW - 2 x AWG18 + Plug (USA) Ⓡ

- CE / RoHS / UL



BATTERY

BATTERY RGBW LED

- Multicolor LEDs RGBW

- Controller RF433 Mhz / 10-15 meters range

- 450 - 1100 LM Max. (depending on the model)

- 12 - 72 W Max. (depending on the model)

- Li-ion Battery 5.2.19 Ah (depending on the model) 12V / 6-8 h autonomy / Load 5h - 500 cycles

- Charger: 1.5A - 4A (depending on the model) IN: 100-240V AC / 50-60Hz

- IEE: Class A / CE / RoHS / IP65 (Suitable for wet areas)

- Ta: 40°C

BATTERY RGBW LED DMX

- Multicolor LEDs RGBW

- Controller RF433 Mhz / 10-15 meters range

- DMX 1024 decoder / 2.4 Ghz wireless signal.

-Home WiFi DMX wireless controller, compatible with IOS and Android (not included)

-Professional DMX wireless controller, connector XLR (not included)

- Li-ion Battery 5.2 - 19 Ah (depending on the model) 12V / 6-8 h autonomy / Load 5h - 500 cycles

- Charger: 1.5A - 4A (depending on the model) IN: 100-240V AC / 50-60Hz

- 1100 LM Max. (Models subject to availability)

- 12 - 72 W Max. (Models subject to availability)

- IEE: Class A / CE / RoHS / IP65 (Suitable for wet areas)

- Ta: 40°C

BATTERY NANO LED RGBW

- Multicolor LEDs

- Controller RF433 Mhz / 10-15 meters range

- 40 - 100 LM Max.

- 1.5 W Max.

- Li-ion Battery 2 Ah / 5V / 6-8 h autonomy / Load 5h / IN: 100-240V AC / 50-60Hz

- IEE: Class A / CE / RoHS / IP65 (Suitable for wet areas)

- Ta: 40°C

LED WHITE TABLE LAMPS

- Single LED Warm White 2700k°

- ON/OFF & Dimmer tactile

- 0.8W (Battery) - 3.3 W Max. (Power supply).

- Li-ion Battery 3000 mA 4.2V / 12 h autonomy / Load 4h - 500 cycles

- USB Charger 5v DC 1A / IN: 100-240V AC / 50-60Hz

- Ta: 40°C

- IEE: Class A++ / IP54 / CE

RGBW LED TABLE LAMPS

- 5 LEDs Colors. (Blue / Fucsia / Amber / Turquoise / Warm White 2700k°)

- ON/OFF & Dimmer tactile

- 0.8W (Battery) - 3.3 W Max. (Power supply).

- Li-ion Battery 3000 mA 4.2V / 12 h autonomy / Load 4h - 500 cycles

- USB Charger 5v DC 1A / IN: 100-240V AC / 50-60Hz

- Ta: 40°C

- IEE: Class A+ / IP54 / CE

RGBW LED DMX TABLE LAMPS

- 5 LEDs Colors. (Blue / Fucsia / Amber / Turquoise / Warm White 2700k°)

- ON/OFF & Dimmer tactile

- DMX 1024 decoder / 2.4 Ghz wireless signal.

-Home WiFi DMX wireless controller, compatible with IOS and Android (not included)

-Professional DMX wireless controller, connector XLR (not included)

- 0.8W (Battery) - 3.3 W Max. (Power supply).

- Li-ion Battery 3000 mA 4.2V / 12 h autonomy / Load 4h - 500 cycles

- USB Charger 5v DC 1A / IN: 100-240V AC / 50-60Hz

- Ta: 40°C

- IEE: Class A+ / IP54 / CE



EN | TECHNICAL INFORMATION

Material Features

POLYPROPYLENE

- Material: Polypropylene resin with glass fiber , UV stabilizer.
- Process: injection moulding.
- Shock resistant.
- Light weight.
- 100% recyclable.

POLYETHYLENE

- Material: Resin. Linear low-density poethylene. UL94 HB.
- Process: Rotational Moulding.
- Resistant to UVl. Fattore UV8, equivalent to 8.000 hours of Florida sunlight.
- Resistant to extreme temperatures (-60°C to + 80°C) / (-76°F to 176°F)
- Shock Resistant.
- Light weight
- The planters are easily drilled to make draining holes.
- Recyclable 100%.

POLYCARBONATE

- Material: Polycarbonate resin. Low viscosity, high strength.
- Process: Injection Moulding.
- Shock Resistant.
- Light weight
- Recyclable 100%.

ALUMINIUM (TABLE BASE)

- Material: AISI12 (EN AC-44100).
- Process: Cast aluminum.
- Shock Resistant.
- Recyclable 100%.
- Powder coated cast aluminum.

ALUMINUM (PROFILE)

- Material: 6060 (AlMgSi,3.3206,A96060).
- Process: Aluminum extrusion.
- Shock Resistant.
- Recyclable 100%.
- Lacquered.

IROKO WOOD (SLOO COLLECTION)

- Hard and very resistant wood.
- Process: Turning.
- Shock resistant.
- Recyclable 100%.

STAINLESS STEEL (COUNTER TOP)

- Material: AISI12 (EN AC-44100).
- Process: Laser cut.
- Shock Resistant.
- Recyclable 100%.

PADDED FOAM

Polyurethane foam is suitable for outdoor use and in areas with high humidity.

Perfectly waterproof, high drying capacity, comfortable and easily cleaned.

Properties	Unit	Value	Specifications
Composition	-	100% Polyester	-
Maximum temperature	°C	110.0	±1.0
Manufacturing process	Dry carded and termal drying		
Recyclability	100%, without additives or binding agents		

Other caracterics:

- It does not absorb or retain moisture.
- It is not affected by mould, insects or rodents.
- It does not cause irritation to the skin or the mucous membranes.

POLYURETHANE FOAM (UPHOLSTERED FURNITURE)

Furniture made produced with Polyurethane foam injected. The foam has high resilience and durability. The flexible Polyurethane foam is covered with a elastic cellular net that keeps the original product's shape after its use. Prevents fungal and bacterial growth.

Mechanical properties.

- Tensile strength resistance: between 3 & 10 (Kp/cm2)
- Compression resistance: between 1,5 & 9 (Kp/cm2)
- Shear strength resistance: between 1 & 5 (Kp/cm2)
- Modulus of elasticity: between 40 & 200 (Kp/cm2)

Table Tops Features

DEKTON®

Ceramic surface with high resistance, suitable for indoor and outdoor use.

				Kelya	Entzo	Danae
Flexural tensile strength or modulus of rapture	UNE EN ISO 10545-4	Average flexural resistance	N/ mm2	46	45	55
		Average break load	N	2548	2313	2356
		Average break strength	N	14966	13559	13818
Water absorption, apparent porosity, density	UNE EN ISO 10545-3	Water absorption by boiling	%	0	0,1	0,1
		Water absorption by vacuum	%	0,1	0,1	0,1
		Open porosity	%	0,2	0,2	0,2
		Aparent relative density	g/cm3	2,51	2,61	2,53
Aparent density	g/cm3	2,50	2,61	2,52		
Resistance to deep abrasion	UNE EN ISO 10545-6	Wear volume	mm3	125	106	115
Impact resistance	UNE EN ISO 10545-5	Coefficient of restitution (COR)	-	0,85	0,85	0,85
Determination of linear thermal expansion	UNE EN ISO 10545-8	Expansion 30-100°C	°C-1	6,5 · 10-6	5,1 · 10-6	6,3 · 10-6
Thermal shock resistance	UNE EN ISO 10545-9	Damage	-	ULA (no damage)	ULA (no damage)	ULA (no damage)
Moisture expansion	UNE EN ISO 10545-10	Expansion max	mm/m	0,1	0,1	0,1
		Expansion mid	mm/m	0,0	0,0	0,0
Frost resistance	UNE EN ISO 10545-12	Damage	-	ULA (no damage)	ULA (no damage)	ULA (no damage)

HPL

Suitable for indoor and outdoor use.

HPL Tabletops for Mari-sol, Faz and Delta table bases thickness is 10mm ± 0.55.

Thickness	ISO 4586 ½	mm	13 ± 0,55	
Density	ISO 1183	Kg/m3	1400 - 1500	
Absorción de agua	ISO 4586 ½	%	Weight	2,0 max.
			Thickness	2,0 max.
Estabilidad dimensional a altas temperaturas	ISO 4586 ½	%	Long.	0,25 max.
			Trans.	0,55 max.
Hardness	ASTM D 785	HR E	97 ca	
Resistencia a la flexión	ISO 178	MPa	Long.	145 min
			MPa	135 min

GLASS

Security tempered glass. Thickness: 10 mm.

Technical Features	Units	Value
Resistant to soft body impact		2(B)2
Resistance against suddne temperature changes	K	40
Resistant to wind, snow and large weight	mm	10
Sound insulation	dB	34 (-1,-3)
Thermal Properties		
Thermal Transmittance (value U)	W/(m2.K)	5,6
Light Transmission tV		0,53
Light Refleltion pV		0.06/0.06
Solar Transmission tE		0.52
Solar Reflection pE		0.06/0.06

Fabrics Features

NAUTICAL

Composition	Vinyl / 100%Polyester HiLoft
Weight	780 gr/m2
Abrasion	>120.000 cycles
Fire Retardancy	EN 1021 (Parts 1 - 2) - M2 (NF P 92.507) BS 5852 - DIN 53438/T2
Cold Crack	-20°C
UV Resistance	1000 hours / Factor 7UV
Antibacterial Treatment	Yes
Outdoor Using	Yes

SILVERTEX

Composition	Vinyl / 100%Polyester HiLoft
Weight	685 gr/m2
Abrasion	>300.000 cycles (Martindale)
Fire Retardancy	EN 1021 (Parts 1 - 2) DIN 4102 B2 - NF P 92-503 / M2 UNE 23.727-90 IR/ M2 - IMO A.652 (16) annex 1, 8.2&8.3
Cold Crack	-23°C
UV Resistance	1000 hours / Factor 7UV
Antibacterial Treatment	Yes
Outdoor Using	Yes

BATYLINE

Composition	Polyester / PVC Composite
Weight	500 gr/m2
Abrasion	SC (very heavy use)
Fire Retardancy	EN 1021 (Parts 1 - 2) - DIN 4102 B1 - NFP 92-503/M2 B-S2-D0 - NF-EN 13501-1 - OMI A.652 (part 16) CAL TB N° 117 -2000 Section E, Part 1
Extreme working temperatures	-30°C / +70°C
UV Resistance	ΔE lab < 3 UVA 340 / 2000 hours
Antibacterial Treatment	Yes
Outdoor Using	Yes

CREVIN

Upholstery fabric, that as and natural appearance and can be easy cleaned by washing machines, allowing an easy removal of mildew. Suitable for indoor and outdoor use.

Composition	57%PP 38%PES 5%PU
Weight	546 gr/m2
Abrasion	EN ISO 12947-2:1998, EN 14465:2003/A1:2006 60.000
Assessment of Ignitability	EN 1021-1:2006
UV Resistance	ΔE lab > 6 EN ISO 105-B04:1997 (1000 hours)
Antibacterial Treatment	Yes
Outdoor Using	Yes

DICKSON® SUNVISION

Composition	High tenacity polyester PVC coated and solution dyed acrylic.
Finish	Cleangard special dirt-resistant and awning water repellent treatment.
Weight	275 gr/m2
Colour fastness weather conditions 1000h	4-5/5 (Norme: ISO 105 B04)
Colour fastness UV	7-8/8 (Norme: ISO 105 B02)
Tear strength	Warp 6,5 daN / Weft 5 daN
Tensile strength	Warp 80 daN / Weft 80 daN
Outdoor Using	Yes

SUNBRELLA® VELUM

Outdoor fabrics are waterproof. Used for curtains of Canopys and round Daybed.

Composition	100% Sunbrella Acrylic
Finish	Water-Repellent & Stain Proff
Weight	165 gr/m2
Colour fastness weather conditions 1000h	4-5/5 (Norme: ISO 105 B04)
Colour fastness UV	7-8/8 (Norme: ISO 105 B02)
Colour fastness 40°C washing	5/5 (Norme: ISO 105 C01)
Care Instructions	Washable 30°C
Environment	Confidence in textiles CQ 638/2 - Greenguard
Outdoor Using	Yes

SUNBRELLA® SAVANE

Composition	100% Sunbrella Acrylic
Finish	PFOS (perfluoroctanyl sulphonate)
Weight	400 gr/m2
Colour fastness UV	8/8 (Norme: ISO 105 B02)
Colour fastness UV - Outdoor	4-5/5 (Norme: ISO 105 B04)
Colour fastness 40°C washing	5/5 (Norme: ISO 105 C06)
Care Instructions	Lavable 40°C
Environment	Confidence in textiles CQ 638/7 - Greenguard
Outdoor Using	Yes

SUNBRELLA® NATTÉ

Composition	100% Sunbrella acrylic
Finish	Water-Repellent & Stain Proff
Weight	275 gr/m2
Colour fastness Indoor	Class/8:8 ISO 105B02
Colour fastness Outdoor	Class/5:4-5 ISO 105B04 1000h
Care Instructions	Washable 30°C
Outdoor Using	Yes

GLAD

Composition	100% PP (Ten Stars Yarn)
Weight	975 gr/m2
Abrasion	30.000 cycles
Fire Retardancy	cigarette test: BS5852 part 1:(1990)
Pilling	5
UV Resistance	Factor 7UV BS EN ISO 105-B02:1999
Antibacterial Treatment	Yes
Outdoor Use	Yes
Resistant to sea water	5

DRALON

100% acrilic fiber that offers us the same properties as a asynthetic fabric and is very soft to the touch

Composition	100% Arcylic fiber Dralon®
Weight	185-190 gr/m2
Abrasion	25.000 cycles DIN EN ISO 12947 - 2 (Martindale)
Fire Retardancy	BS5852 0/1 - UNE 10211 - BS7176 Low Hazard
Pilling	4/5
UV Resistance	UV40 Standard 801
Satin proof finishing	3-5 washings
Outdoor Use	Yes
Resistant to sea water	5



DMX Wireless

DMX 512 (Digital Multiplex) is a mechanism used for the electronic control of entertainment lighting, enabling communication between the control-table, our own lights and light sources. You can create customized and special environments. This allowed to control every Vondom product independently or in groups.

There are 2 different DMX Wireless, depending on our customer needs:

DMX WIRELESS PROFESSIONAL XLR PACK


Vondom DMX Wireless Professional XLR you can control all LED RGBW VONDOM pieces from your Mix Tables, PC+software, Domotic panels, etc.

1* DMX Wireless Standard Configuration


Preset three separate Family products: POTS, LAMPS & FURNITURE.

2* DMX Wireless Customized Configuration

You can send us your customized special environment that you want to control independently and we will set it up.

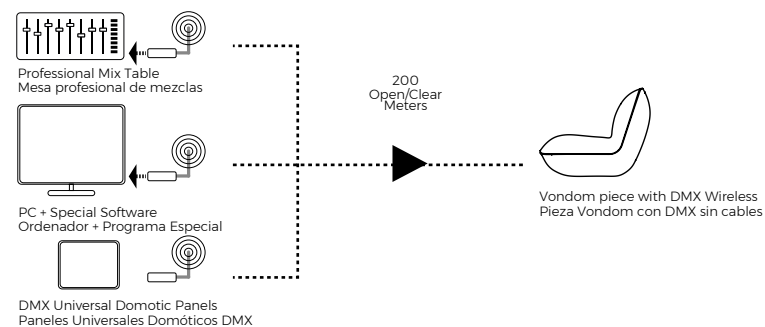

2* Example of DMX Wireless Professional Customized Configuration

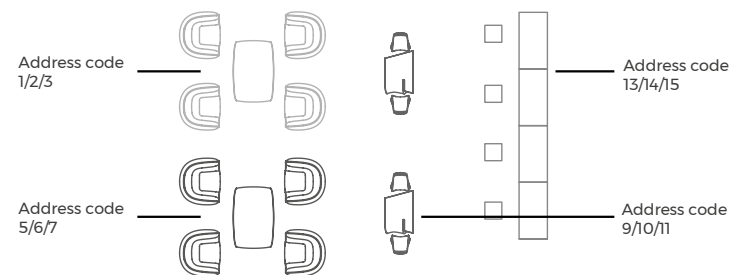

DMX WIRELESS HOME WIFI PACK


Vondom DMX Wireless Home Wi-Fi Pack is a Wi-Fi access point to control all LED RGBW VONDOM items with your IOS or Android devices.

1* DMX Wireless Standard Configuration


Preset three separate Family products: PLANTERS, LAMPS & FURNITURE.

2* DMX Wireless Customized Configuration

You can send us your customized requirements in order to control individually each item/group and we will set it up. (Max. 8 rooms).

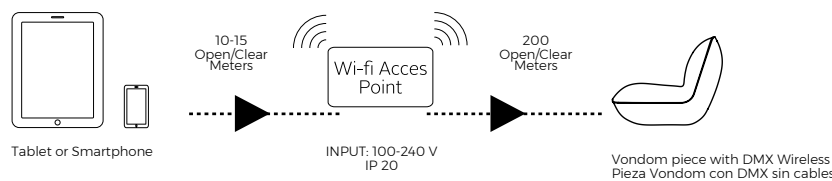

2* Example of DMX Wireless Home Customized Configuration

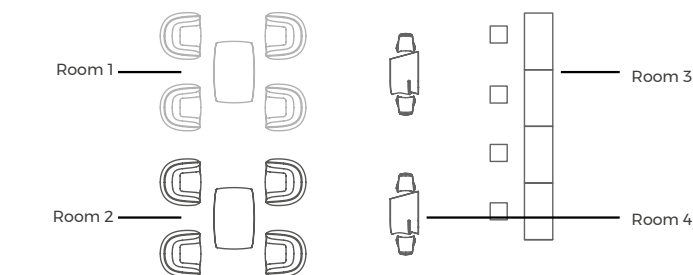

DMX IS FUN!

MAINTENANCE & SAFETY GENERAL

Our productions are manufactured according to ISO 9001:2008 quality and ISO 14001:2004 environmental quality, by using high quality materials we guarantee long life of our products.

In order to provide a durable and safe use to the product, please follow the following recommendations:

- All our products are suitable for indoor and outdoor use.
- Continuous exposure to the sun (especially with the dark colors) can cause burning injuries by direct contact with your skin. To avoid this, please check the temperature of the furniture in case of long-term exposure to the sun.
- Place the item on a flat surface to avoid uncontrolled movements.
- Keep the item far from excessive heat sources.
- The product is not a toy. To avoid accidents, do not allow children to play with it.
- Keep furniture away from dust to keep it clean, if cleaning is required we recommend the use of pressure washers, such as KARCHER'S and/or domestic degreasing cleaner periodically. Never use abrasive or corrosive products.
- To preserve the product, we recommend the usage of VONDOM cover for every item.
- In the case of lacquered products, we recommend car wax every 2 or 3 months, as it will avoid the appearance of possible scratches.
- Outdoor cushions are available only on some models. We recommend you clean them periodically with a cloth and basic soap and water.
- Clean the stainless steel parts with appropriate products.
- When changing bulbs, please make sure the cord is not connected to the main power.
- If cords suffer any damage, they must be changed exclusively by the manufacturer or by a professional.
- If the RGB LED stops working, please do not handle it. Contact the manufacturer or your distributor immediately.



CLEANING GENERAL


Vondom Outdoor Furniture cleans easily and stays impeccable.

Steps for clean outdoor furniture:

1. Spray the degreaser over the dirty surface.
 2. Rub it with a damp cloth.
 3. Rinse with abundant water with pressure washer.
- Cautions! Don't use pressure washer for cushions and lacquered finish items.
4. Dry it outside and enjoy our products.

We hope you enjoy our products. If you need any further information, please contact our CUSTOMER SERVICE department by calling **+34 96 239 84 86** or sending us an e-mail to **info@vondom.com**.

Remote Control Instructions

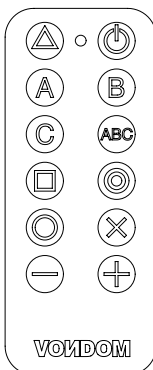

- △ Repeat last order (Re-send order)
- ⏻ ON / OFF
- A/B/C Groups (A = Furniture and furnishings / B = Planters & Pots / C = Lamps) can be customized, 3 maximum items.
- ABC Controls all groups simultaneously
- Automatic color change
- Memory Button (for programming custom colors) (consult "advanced functions")
- Programmed colors
- ⊗ Warm White 2700K / Natural White 4000k / Cool White 6500k
- +/- More / less (speed or intensity)

- Remote Control Battery: CR2032
- RF Controller: 433 Mhz / 10-15 meters (30-45 feet) range
- IP20 / indoor use only.

KEY ICONS

- Please avoid direct exposure to sun and rain.

ES | INFORMACIÓN TÉCNICA

Acabados y Extras Mobiliario

SIMPLE

Acabado mate.

LACADO

Acabado lacado brillo.

BICOLOR LACADO

Acabado lacado brillo en dos colores diferentes. Para evitar posibles daños no se recomienda apilar el producto.

EXTRAS / OPCIONES

LED BLANCO

Mobiliario con iluminación de color blanco mediante tecnología LED. Solo disponible en acabado hielo mate.

RGBW LED

Mobiliario con iluminación interior mediante tecnología LED RGBW y mando a distancia para cambiar de color. Solo disponible en acabado hielo mate.

RGBW LED DMX

Mobiliario con iluminación interior mediante tecnología LED RGBW y mando a distancia para cambiar de color. Controlado también por DMX-1024 (wireless), permitiendo la comunicación entre uno o multiples productos simultaneamente mediante el transmisor DMX (no incluido). Hay dos opciones para seleccionar. Professional XLR DMX y Home WIFI DMX.

- 1º DMX Wireless configuración estandar.
- 2º DMX Wireless configuración personalizable según el cliente.

CON BATERÍA

RGBW LED BATTERY

Mobiliario con iluminación interior mediante tecnología LED RGBW, alimentado por una batería. Se incluye mando a distancia para cambiar de color y cargador. Solo disponible en acabado hielo mate.

RGBW LED DMX BATTERY

Mobiliario con iluminación interior mediante tecnología LED RGBW, alimentado por una batería (incluye cargador y mando a distancia para cambio de color). Controlado por DMX-1024 (wireless), permitiendo la comunicación entre uno o multiples productos simultaneamente mediante el transmisor DMX (no incluido). Hay dos opciones para seleccionar: Professional XLR DMX y Home WIFI DMX.

Ambas opciones disponen de varias configuraciones:

- 1º DMX Wireless configuración estandar.
- 2º DMX Wireless configuración personalizable según el cliente.

Acabados y Extras Maceteros y Jardineras

SIMPLE

Acabado mate.

SIMPLE LACADA

Acabado lacado brillo.

BASIC

Macetero acabado mate.

AUTORRIEGO

Macetero acabado mate con sistema de autorriego.

LACADO

Macetero acabado lacado brillo con sistema de autorriego.

EXTRAS / OPCIONES

LED BLANCO

Maceta con sistema de autorriego con iluminación interior de color blanco mediante tecnología LED. Solo disponible en acabado hielo mate.

RGBW LED

Maceta con sistema de autorriego, que incluye iluminación interior mediante tecnología LED RGBW y mando a distancia para cambiar de color. Solo disponible en acabado hielo mate.

RGBW LED DMX

Maceta con sistema de autorriego, que incluye iluminación interior mediante tecnología LED RGBW y mando a distancia para cambiar de color. Controlado por DMX-1024 (wireless), permitiendo la comunicación entre uno o multiples productos simultaneamente mediante el transmisor DMX (no incluido). Hay dos opciones para seleccionar. Professional XLR DMX y Home WIFI DMX. Ambas opciones disponen de varias configuraciones:

- 1º DMX Wireless configuración estandar.
- 2º DMX Wireless configuración personalizable según el cliente.

CON BATERÍA

RGBW LED BATTERY

Maceta con sistema autorriego, que incluye iluminación interior mediante tecnología LED RGBW, alimentado por una batería. Se incluye mando a distancia para cambiar de color y cargador. Solo disponible en acabado hielo mate.

RGBW LED DMX BATTERY

Maceta con sistema autorriego, que incluye iluminación interior mediante tecnología LED RGBW, alimentado por una batería (incluye cargador y mando a distancia para cambio de color). Controlado por DMX-1024 (wireless), permitiendo la comunicación entre uno o multiples productos simultaneamente mediante el transmisor DMX (no incluido). Hay dos opciones para seleccionar: Professional XLR DMX y Home WIFI DMX.

Ambas opciones disponen de varias configuraciones:

- 1º DMX Wireless configuración estandar.
- 2º DMX Wireless configuración personalizable según el cliente.



Bluetooth Sound System ✨

Conecta tu smartphone o tablet a los altavoces integrados en el mobiliario Vondom por Bluetooth.

- Sound systems 200W Dual component.
- Bluetooth Ready v. 4.0.
- Entrada: AUX Jack 3,5 mm.
- USB de carga para cualquier dispositivo portátil
- Salida 5V= 1500mA

Iluminación Información técnica

FUENTE DE ALIMENTACIÓN

LED BLANCO

- Color simple LEDs 4500 K
- 720 - 2800 LM Máx. (según modelos)
- 12 - 72 W Máx. (según modelos)
- Fuente de alimentación: Mean Well / Class 2 / IN: 100 - 240V AC / 50 - 60Hz
- IEE: Class A
- IP65 / aplicable para zonas húmedas
- Ta: 40°C

- 4-5 m. de cable Blanco Ho5RN-F 2G1 mm2 + Clavija (EU - AUS - UK) ☺ ☹ ☹

- 4-5 m. de cable Blanco SJTW - 2 x AWG18 + Clavija (USA) ⚡

- CE / RoHS / UL



NANO LED BLANCO

- Color simple LEDs 4500 K
- 40 LM
- 1,4 W Máx.
- Fuente de alimentación de pared: IN: 100-240V AC / 50-60Hz
- IEE: Clase A
- IP20 / Aplicable para interiores
- 2 m. de cable Transparente con interruptor de mano + Clavija EU ☺
- Ta: 35°C
- CE / RoHS

LED RGBW

- Multicolor LEDs RGBW
- Controlador RF433 Mhz / 10-15 metros de alcance
- 450 - 1100 LM Máx. (según modelos)
- 12 - 72 W Máx. (según modelos)
- Fuente de alimentación: Mean Well / Class 2 / IN: 100-240V AC / 50-60Hz
- IEE: Clase A
- IP65 / Aplicable para zonas húmedas
- Ta: 40°C
- 4-5 m. de cable Blanco Ho5RN-F 2G1 mm2 + Clavija (EU - AUS - UK) ☺ ☹ ☹
- 4-5 m. de cable Blanco SJTW - 2 x AWG18 + Clavija (USA) ⚡
- CE / RoHS / UL



LED RGBW DMX

- Multicolor LEDs RGBW
- Controlador RF433 Mhz / 10-15 metros de alcance
- Decodificador DMX 1024 / Señal sin cables 2,4 Ghz
 - Controlador Home WiFi DMX Sin Cables, compatible con IOS y Android (no incluido)
 - Controlador Profesional DMX Sin Cables, conector XLR (no incluido)
- 450 - 1100 LM Máx. (según modelos)
- 12 - 72 W Máx. (según modelos)
- Fuente de alimentación: Mean Well / Class 2 / IN: 100-240V AC / 50-60Hz
- IEE: Clase A
- IP65 / Aplicable para zonas húmedas
- Ta: 40°C
- 4-5 m. de cable Blanco Ho5RN-F 2G1 mm2 + Clavija (EU - AUS - UK) ☺ ☹ ☹
- 4-5 m. de cable Blanco SJTW - 2 x AWG18 + Clavija (USA) ⚡
- CE / RoHS / UL



CON BATERÍA

LED RGBW BATERIA

- Multicolor LEDs RGBW
- Controlador RF433 Mhz / 10-15 metros de alcance
- 450 - 1100 LM Máx. (según modelos)
- 12 - 72 W Máx (según modelos)
- Batería Li-ion 5.2 - 19 Ah (según modelos) 12V / 6-8 h autonomía / Carga 5h - 500 ciclos /
- Cargador 1,5A - 4A (segun modelos) IN: 100-240V AC / 50-60Hz
- CE / RoHS / IP65 (Aplicable para zonas húmedas)
- Ta: 40°C

LED RGBW DMX + BATERIA

- Multicolor LEDs RGBW
- Controlador RF433 Mhz / 10-15 metros de alcance
- Decodificador DMX 1024 / Señal sin cables 2,4 Ghz
 - Controlador Home WiFi DMX Sin Cables, compatible con IOS y Android (no incluido)
 - Controlador Profesional DMX Sin Cables, conector XLR (no incluido)
- 450 - 1100 LM Máx. (según modelos)
- 12 - 72 W Máx (según modelos)
- Batería Li-ion 5.2 - 19 Ah (según modelos) 12V / 6-8 h autonomía / Carga 5h - 500 ciclos /
- Cargador 1,5A - 4A (segun modelos) IN: 100-240V AC / 50-60Hz
- CE / RoHS / IP65 (Aplicable para zonas húmedas)
- Ta: 40°C

NANO LED RGBW BATERIA

- Multicolor LEDs RGBW
- Controlador RF433 Mhz / 10-15 metros de alcance
- 40 - 100 LM Máx - 1,5 W Máx
- Batería Li-ion 2 Ah / 5V / 6-8 h autonomía / Carga 5h /
- Cargador 0,5A IN: 100-240V AC / 50-60Hz
- CE / RoHS / IP65 (Aplicable para zonas húmedas)
- Ta: 40°C

LED BLANCO LÁMPARAS DE MESA

- LED Blanco cálido 2700kº
- ON/OFF y Control de intensidad táctil
- 0.8W (Con batería) - 3.3 W Max. (Conectado a la corriente).
- Batería Li-ion 3000 mA 4.2V / 12 h autonomía / Carga 4h - 500 ciclos
- Cargador USB 5v DC 1A / IN: 100-240V AC / 50-60Hz
- Ta: 40°C
- IEE: Clase A++ / IP54 / CE

RGBW LED LÁMPARAS DE MESA

- 5 LEDs Colors. (Azul / Fucsia / Ámbar / Turquesa / Blanco cálido 2700kº)
- ON/OFF y Control de intensidad táctil
- 0.8W (Con batería) - 3.3 W Max. (Conectado a la corriente).
- Batería Li-ion 3000 mA 4.2V / 12 h autonomía / Carga 4h - 500 ciclos
- Cargador USB 5v DC 1A / IN: 100-240V AC / 50-60Hz
- Ta: 40°C
- IEE: Clase A+ / IP54 / CE

RGBW LED DMX LÁMPARAS DE MESA

- 5 LEDs Colors. (Azul / Fucsia / Ámbar / Turquesa / Blanco cálido 2700kº)
- ON/OFF y Control de intensidad táctil
- Decodificador DMX 1024 / Señal sin cables 2,4 Ghz
 - Controlador Home WiFi DMX Sin Cables, compatible con IOS y Android (no incluido)
 - Controlador Profesional DMX Sin Cables, conector XLR (no incluido)
- 0.8W (Con batería) - 3.3 W Max. (Conectado a la corriente).
- Batería Li-ion 3000 mA 4.2V / 12 h autonomía / Carga 4h - 500 ciclos
- Cargador USB 5v DC 1A / IN: 100-240V AC / 50-60Hz
- Ta: 40°C
- IEE: Clase A+ / IP54 / CE



Acabados y Extras Nanos

Producto de dimensiones reducidas fabricado en resina de polietileno, con doble pared. Producto apto para exterior e interior.

NANO BASIC

Acabado mate.

NANO LACADO

Acabado lacado brillo.

EXTRAS / OPCIONES

NANO LED BLANCO

Producto de dimensiones reducidas color hielo con iluminación LED de color blanco. Sólo para interiores.

NANO LED RGBW CON BATERIA (CHRISMY)

Producto de dimensiones reducidas color hielo con iluminación mediante tecnología Led RGBW. Solo para interiores. Cargador y batería incluidos. (Incluye mando para cambiar de color).

ES | INFORMACIÓN TÉCNICA

Materiales Características

POLIPROPILENO

- Material: Resina de polipropileno con fibra de vidrio, Estabilizador UV.
- Proceso: moldeo por inyección.
- Resistente a los golpes.
- Ligero .
- 100% reciclable.

POLIETILENO

- Material: Resina de . Polietileno lineal de baja densidad. UL94 HB.
- Proceso: Moldeo rotacional.
- Resistente a UVI. Factor UV8, equivalente a 8.000 horas de sol de Florida.
- Resistente a temperaturas extremas (-60°C a +80°C) / (-76°F to 176°F)
- Resistente a impactos.
- Ligera.
- Reciclable 100%.

POLICARBONATO

- Material: Resina de policarbonato. Alta resistencia a la rotura.
- Proceso: moldeo por inyección.
- Resistente a los golpes.
- Ligero .
- 100% reciclable.

ALUMINIO (PIES DE MESA)

- Material: AISI12 (EN ACE-44100)
- Proceso: Fundición de aluminio.
- Resistente a los golpes.
- 100% reciclable.
- Pintado al horno con pintura epoxy.

ALUMINIO (PERFILERÍA)

- Material: 6060 (AlMgSi,3.3206,A96060).
- Proceso: Extrusión de aluminio.
- Resistente a los golpes.
- 100% reciclable.
- Pintado al horno con pintura epoxy.

RELLENO DE LOS COJINES PARA SILLAS

Espuma de poliuretano ideal para usos exteriores y en zonas con mucha humedad.

Características Técnicas	Unidad	Valor	Tolerancia
Composición	-	100% Poliéster	-
Tipo de fibra	-	Solida, semi-dull	-
Tª máxima de utilización	°C	110.0	± 1.0
Proceso de Fabricación	Cardado por vía seca y consolidado térmico.		
Reciclabilidad	100%, en cuanto a que no contiene aditivos ni ligantes.		

Otras Propiedades:

- No absorbe ni retiene humedad, no es putrescible.
- No constituye alimento para insectos ni roedores.
- No desprende partículas durante su manipulación. Es un producto inocuo, no irrita mucosas ni la piel.

ESPUMA DE POLIURETANO (PRODUCTOS TAPIZADOS)

Mobiliario fabricado en poliuretano flexible inyectado en frío. Este material posee una alta resiliencia y durabilidad. La espuma flexible de poliuretano posee una estructura celular abierta, es un material muy elástico, que cuando se retira la carga a la que haya sido sometida, recupera instantáneamente su forma original. Dificulta el crecimiento de hongos y bacterias.

- Resistencia a la tracción entre 3 y 10 (Kp./cm2)
- Resistencia a la compresión entre 1,5 y 9 (Kp./cm2)
- Resistencia al cizallamiento entre 1 y 5 (Kp./cm2)
- Módulo de elasticidad entre 40 y 200 (Kp./cm2)

Tejidos Características

NÁUTICA

Tejido náutico apto para interior y exterior. Opción estándar para los acolchados.

Composición	Vinilo /100% Poliéster HiLoft
Peso	780 gr/m2
Abrasión	>120.000 ciclos
Tratamiento Ignifugo	EN 1021 (Parts 1 - 2) - M2 (NF P 92.507) BS 5852 - DIN 53438/T2
Temperatura mínima de uso	-20°C
Resistencia UV	1000 horas / Factor 7UV
Tratamiento antibacteriano	Sí
Apto para exterior	Sí

SILVERTEX

Tejido vinílico apto para interior y exterior. Opción especial para los acolchados.

Composición	Vinilo / 100% Poliéster HiLoft
Peso	685 gr/m2
Abrasión	>300.000 ciclos (Martindale)
Tratamiento Ignifugo	EN 1021 (Partes 1 - 2) DIN 4102 B2 - NF P 92-503 / M2 UNE 23.727-90 IR/ M2 - IMO A.652 (16) anexo 1, 8.2&8.3
Temperatura mínima de uso	-23°C
Resistencia UV	1000 horas; Factor 7UV
Tratamiento antibacteriano	Sí
Apto para exterior	Sí

BATYLINE

Tela tejida en poliéster protegida por PVC. Apta para interior y exterior.

Composición	Poliester / PVC Compuesto
Peso	500 gr/m2
Abrasión	SC (uso muy severo)
Tratamiento Ignifugo	EN 1021 (Partes 1 - 2) - DIN 4102 B1 - NFP 92-503/M2 B-S2-DO - NF-EN 13501-1 - OMI A.652 (parte 16) CAL TB N° 117 -2000 Sección E, Parte 1
Temperatura extremas de uso	-30°C / +70°C
Resistencia UV	ΔE lab < 3 <p>UVA 340 / 2000 horas</p>
Tratamiento antibacteriano	Sí
Apto para exterior	Sí

CREVIN

Tejido de tapicería con aspecto natural. Apta para interior y exterior. Fácil limpieza de las manchas y el moho.

Composición	57%PP 38%PES 5%PU
Peso	546 gr/m2
Abrasión	EN ISO 12947-2:1998, EN 14465:2003/A1:2006 60.000
Reacción al fuego	BS5852 0/I, EN 1021 1/2, BS7176 Low hazard
Resistencia UV	ΔE lab > 6 EN ISO 105-B04:1997 (1000 horas)
Tratamiento antibacteriano	Sí
Apto para exterior	Sí

SUNVISION DICKSON®

Tejido para pantalla solar exterior.

Composición	Hilo poliéster de alta tenacidad recubierto de PVC e hilo acrílico teñido en masa
Acabado	Tratamiento Clengard antimanchas e impermeabilizante
Peso	165 gr/m2
Solidez de los colores a intemperies 1000h	4-5/5 (Norme: ISO 105 B04)
Solidez de los colores UV	7-8/8 (Norme: ISO 105 B02)
Resistencia al desgarro	Urdimbre 6,5 daN / Trama 5 daN
Resistencia a la rotura	Urdimbre 80 daN / Trama 80 daN

VELUM SUNBRELLA®

Tejidos para exterior hidrófugo acrílico 100%. Utilizado para las cortinas de los cenadores y Daybed redondo Vela.

Composición	100% Sunbrella Acrylic
Acabado	Impermeable y resistente a las manchas
Peso	165 gr/m2
Solidez de los colores condiciones climáticas 1000h	4-5/5 (Norma: ISO 105 B04)
Solidez de los colores UV	7-8/8 (Norma: ISO 105 B02)
Solidez del color al lavado 40°C	5/5 (Norma: ISO 105 C01)
Instrucciones de cuidado	Lavable 30°C
Medio ambiente	Confidence in textiles CQ 638/2 - Greenguard
Uso para el exterior	Sí

SAVANE SUNBRELLA®

Tejidos para exterior hidrófugo acrílico 100%.

Composición	100% Sunbrella Acrílico
Acabado	PFOS (perfluorocetano sulfonato)
Peso	400 gr/m2
Solidez colores UV	8/8 (Norma: ISO 105 B02)
Resistencia al color UV - Exterior	4-5/5 (Norma: ISO 105 B04)
Solidez colores al lavado 40°C	5/5 (Norma: ISO 105 C06)
Instrucciones de cuidado	Lavable 40°C
Medio ambiente	Confidence in textiles CQ 638/7 - Greenguard
Uso para el exterior	Sí

NATTÉ SUNBRELLA®

Tejidos para exterior.

Composición	100% Sunbrella Acrílico
Acabado	Impermeable y resistente a las manchas
Peso	275 gr/m2
Solidez colores exterior	Class/8.8 ISO 105B02
Solidez colores interiore	Class/5.4-5 ISO 105B04 1000h
Instrucciones de cuidado	La plancha refuerza el tratamiento. Lavable 40°C
Uso para el exterior	Sí

GLAD

Tejido premium apto para interior y exterior.

Composición	100% PP (Ten Stars Yarn)
Densidad	975 gr/m2
Abrasión	30.000 ciclos
Retardante de fuego	Test de cigarrillo: BS5852 parte 1.(1990)
Pilling	5
Resitencia UV	Factor 7UV BS EN ISO 105-B02:1999
Tratamiento antibacteriano	Sí
Uso exterior	Sí
Resistencia al agua del mar	5

DRALON

Tela 100% Acrilica que nos ofrece las propiedades de un tejido sintético y a la vez es suave al tacto

Composición	100% fibra arcylica Dralon®
Peso	185-190 gr/m2
Abrasion	25.000 cycles DIN EN ISO 12947 - 2 (Martindale)
Retardante de fuego	BS5852 0/I - UNE 1021 1 - BS7176 Low Hazard
Pilling	4/5
Resistencia UV	UV40 Standard 801
Acabado resistente a las manchas	3-5 lavados
Uso exterior	si
Resistencia al agua de mar	5

VOIDOM

Sobres de mesa Características

DEKTON ®

Superficies cerámicas de alta resistencia, apto para uso interior y exterior.

				Kelya	Entzo	Danae
Resistencia a la flexión y carga de rotura.	UNE EN ISO 10545-4	Resistencia flexión media	N/mm2	46	45	55
		Carga de rotura media	N	2548	2313	2356
		Fuerza de rotura media	N	14966	13559	13818
Absorción de agua, porosidad abierta y densidades.	UNE EN ISO 10545-3	Absorción de agua por ebullición	%	0	0,1	0,1
		Absorción de agua por vacío	%	0,1	0,1	0,1
		Porosidad abierta	%	0,2	0,2	0,2
		Densidad relativa aparente	g/cm3	2,51	2,61	2,53
		Densidad aparente	g/cm3	2,50	2,61	2,52
Abrasión profunda.	UNE EN ISO 10545-6	Volumen abrasionado	mm3	125	106	115
Resistencia al impacto.	UNE EN ISO 10545-5	Coeeficiente de restitución medio	-	0,85	0,85	0,85
Dilatación térmica lineal.	UNE EN ISO 10545-8	Dilatación entre 30-100°C	°C ⁻¹	6,5 · 10 ⁻⁶	5,1 · 10 ⁻⁶	6,3 · 10 ⁻⁶
Resistencia a choque térmico.	UNE EN ISO 10545-9	Daño	-	Pasa sin daño	Pasa sin daño	Pasa sin daño
Dilatación por humedad.	UNE EN ISO 10545-10	Expansión máxima	mm/m	0,1	0,1	0,1
		Expansión media	mm/m	0,0	0,0	0,0
Resitencia a la helada.	UNE EN ISO 10545-12	Daño	-	Pasa sin daño	Pasa sin daño	Pasa sin daño

HPL

Tableros prensado a alta presión y alta temperatura. Producto apto para interior y exterior.

Grosor	ISO 4586 ½	mm	13 ± 0,55		
Densidad	ISO 1183	Kg/m3	1400 - 1500		
Absorción de agua	ISO 4586 ½	%	Peso	2,0 max.	
			Espesor	2,0 max.	
Estabilidad dimensional a altas temperaturas	ISO 4586 ½	%	Long.	0,25 max.	
			Trans.	0,55 max.	
Dureza	ASTM D 785	HR E	97 ca		
Resistencia a la flexión	ISO 178	MPa	Long.	145 min	
			MPa	Trans	135 min

VIDRIO

Cristal templado de seguridad. Grososr: 10 mm.

Resistencia al impacto de cuerpo blando		2(B)2
Resistencia contra cambios repentinos de temperatura y diferenciales de temperatura	K	40
Resistencia al viento, nieve, carga permanente e impuesta	mm	10
Atenuación acústica al ruido aéreo directo	dB	34 (-1,-3)
Transmisión térmica (valor U)	W/(m2.K)	5,6
Transmisión luminosa tV		0,53
Reflexión luminosa pV		0,06/0,06
Transmisión energía solar tE		0,52
Reflexión energía solar pE		0,06/0,06

DMX Sin cables

DMX 512 (Digital MultipleX), es un protocolo electrónico utilizado en luminotecnia para el control de la iluminación de espectáculos, permitiendo la comunicación entre los equipos de control de luces y las propias fuentes de luz.

DMX Sin Cables. Puedes crear ambientes especiales y personalizados. Permite controlar cada producto Vondom de manera independiente o en grupos.


Hay 2 tipos de DMX Wireless, dependiendo las necesidades del cliente.

DMX WIRELESS PROFESSIONAL XLR PACK


Con Vondom DMX Profesional XLR Sin cables se puede controlar todos los productos VONDOM mediante una mesas de mezclas, Ordenadores + Programa, Paneles Domoticos, etc.

- 1* DMX Wireless Configuración Estándar
Están preconfiguradas tres Familias independientes: MACETAS, LAMPARAS, MOBILIARIO.
- 2* DMX Wireless Configuración Personalizada

Puede indicarnos los productos o grupos que necesita controlar independientemente y nosotros lo configuraremos.

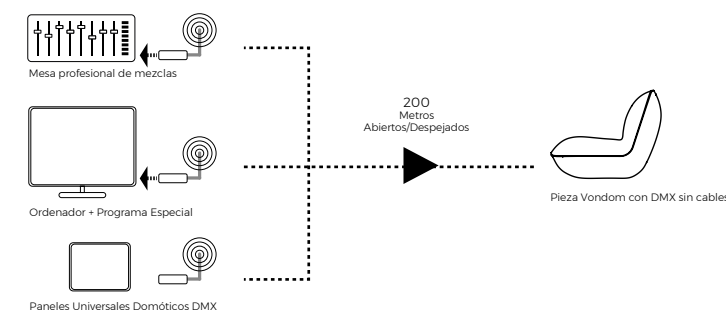

2* Ejemplo de configuración personalizada DMX Wireless Profesional

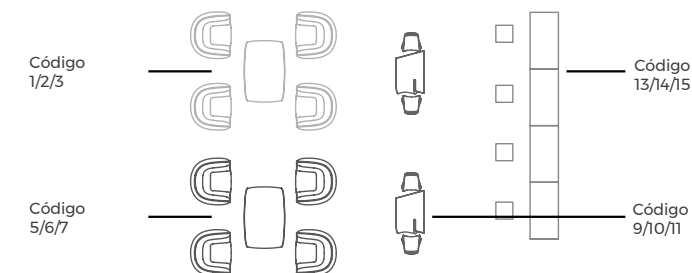

Control Remoto Instrucciones

- △ Repetir la última orden (Enviar la orden de nuevo)
- ⏻ on / off
- A/B/C Grupos (A = Mobiliario / B = Macetas / C = Lámparas) Se pueden personalizar, máximo 3.
- ABC Controlar todas los grupos a la vez
- Cambio de color automático
- Botón Memoria (para programar un color personalizado) (consultar las funciones avanzadas)
- Colores programados
- × Blanco cálido 2700K / Blanco natural 4000k / Blanco frío 6500k
- +/- Mas o menos (velocidad o intensidad)

- Pilas para el Control Remoto: CR2032
- Controlador RF 433 Mhz / 10-15 metros de alcance.
- IP20 / Apto solo para uso interior.


DMX IS FUN!

DMX WIRELESS HOME WIFI PACK


El paquete Home Wi-Fi Vondom DMX Sin cables es un punto de acceso Wi-Fi con el que controlar todos sus productos VONDOM mediante sus dispositivos IOS o Android.

- 1* DMX Wireless Configuración Estándar
Están preconfiguradas tres Familias independientes: MACETAS, LAMPARAS, MOBILIARIO.
- 2* DMX Wireless Configuración Personalizada

Puede indicarnos los productos o grupos que necesita controlar independientemente y nosotros lo configuraremos. (Máx. 8 zonas)

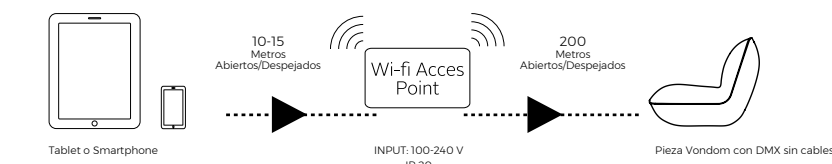

2* Ejemplo de configuración personalizada DMX Wireless Home

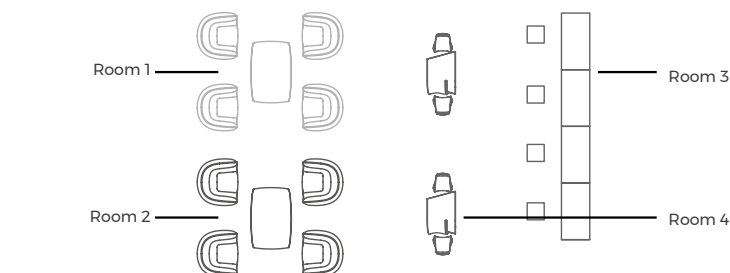

MANTENIMIENTO Y SEGURIDAD GENERAL

Nuestra producción se rige según las normas de nuestro sistema de aseguramiento de la calidad ISO 9001:2008 y de medio ambiente ISO 14001:2004. Y solamente utilizamos materiales de altísima calidad para garantizar una larga vida útil a los productos.

Para proporcionarle un uso duradero y seguro al producto, por favor siga las siguientes instrucciones:

- Todos nuestros productos son aptos tanto para interior como para exterior.
- La exposición continua al Sol, especialmente los colores oscuros, puede provocar lesiones por contacto con la piel. Tenga la precaución de verificar la temperatura de los muebles antes de su uso en horas de sol extremo.
- Coloque la pieza en una superficie regular y sin pendiente para evitar desplazamientos incontrolados.
- Manténgala alejada de fuentes de calor excesivas.
- El producto no es un juguete. No permita que los niños jueguen con ellos, para evitar accidentes.
- Mantenga sus muebles fuera de fuentes de polvo para mantenerlos limpios. En caso de que se requiera su limpieza se recomienda el uso de sistemas de presión de agua tipo KARCHER y/o desengrasantes domésticos de forma periódica. Nunca utilice productos abrasivos o corrosivos.
- Para una mejor conservación del mobiliario, se aconseja cubrir con fundas para cada uno de los artículos.
- En los productos lacados hay que extremar su cuidado puesto que son más delicadas, no debe utilizar agua a presión ni productos abrasivos o corrosivos. Para ello, es aconsejable aplicar cada 2 ó 3 meses cera de carrocería y así eliminar la aparición de posibles arañazos.
- Existen acolchados aptos para el exterior, disponibles para algunas colecciones. Se recomienda limpiarlos periódicamente utilizando un paño con jabón neutro y agua.
- Limpie las partes de acero inoxidable con productos adecuados.
- En caso de sustituir la bombilla, asegúrese de que el cable no está conectado a la corriente eléctrica.
- Si el cable sufre algún deterioro, debe cambiarse exclusivamente por el fabricante o por un profesional.
- Si el LED dejara de funcionar, no manipular en ningún caso y contactar con el fabricante o distribuidor del producto.

LIMPIEZA GENERAL

Vondom Mobiliario de exterior se limpia fácilmente y permanece impecable.

Pasos para limpiar mobiliario the exterior:

1. Pulverice con un quitagrasas la superficie a limpiar.
 2. Frote con un paño húmedo y agua.
 3. Aclare con abundante agua con un sistema de agua a presión.
 4. Déjalo secar en el exterior.
- ¡Atención! No use el sistema de agua a presión para acolchados y acabados lacados.

- Esperemos que disfrute de nuestros productos. Si desea más información no dude en comunicárselo a nuestro departamento de ATENCIÓN AL CLIENTE llamando al **+34 96 239 84 86** o enviando un correo electrónico a **info@vondom.com**

LEYENDAS

- Evitar la exposición directa al sol y la lluvia.

Design
TVG_0621

Studio Vondom
Jun 2021

ES | Las posibles diferencias entre el color original y el color reproducido se deben a la técnica de impresión.

VONDOM se reserva el derecho exclusivo sobre todas las marcas, fotografías y diseños utilizados en sus colecciones, por lo que queda prohibida la fabricación, distribución y/o comercialización de los productos que los contienen, en cualquier medio o soporte.

En particular quedan reservados a favor de su titular los derechos de reproducción total o parcial, la transformación de los mismos y/o su utilización fuera de la esfera privada y con fines comerciales.

VONDOM se reserva el derecho de modificar total o parcialmente sin aviso previo cualquiera de los datos y especificaciones de esta publicación.

Toda la información que aparece en este catálogo referente a dimensiones y capacidades son aproximadas.

© Copyright. 2021. Vondom, S.L.U.

Todos los Derechos a beneficio de VONDOM

EN | The possible differences between pictures and real items could be due to the colors in the printing technology process.

VONDOM all rights related to trademarks, pictures and designs are reserved.

All manufacturing distribution and/or trading activities in any media of the products displayed in the collections are prohibited. Specifically those rights about total or partial reproduction, transformation and/or usage in public with commercial purposes. VONDOM reserves the right to effect any changes or improvements, without notice.

All the information included in this catalogue regarding sizes and capacities are approximated.

© Copyright. 2021. Vondom, S.L.U.

All rights reserved to the order of VONDOM



VONDOM

vondom.com

HEAD QUARTERS - FACTORY

VONDOM S.L.U.
Poligono 6, 16
46293 - Beneixida, Valencia - Spain
t.: +34 96 239 84 86 info@vondom.com

Latinoamérica

Gobernador Melchor Muzquiz 15 - 208
Col. San miguel Chapultepec 11850
Ciudad de México - México
latam@vondom.com

USA

VONDOM LLC.
8803 NW 23rd Street, Miami, FL 33172 - USA
ph.: +1 786 391 0274 - +1 786 353 9108
infousa@vondom.com

China

VONDOM Lifestyle Design Co., Ltd.
C6-103, No. 700, Wan Rong Road, Jing An
200072 - Shanghai - China - +86 21 6521 9916
infochina@vondom.com